

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C


Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0

ORDER INFORMATION





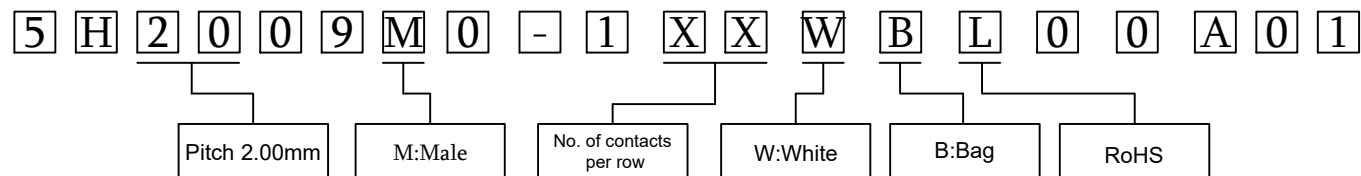


AMTEK 耀德

2021.12.10

Released DCC

No. of contacts	Dimensions		
	A	B	C
02	2.00	8.00	4.60
03	4.00	10.00	6.60
04	6.00	12.00	8.60
05	8.00	14.00	10.60
06	10.00	16.00	12.60
07	12.00	18.00	14.60
08	14.00	20.00	16.60
09	16.00	22.00	18.60
10	18.00	24.00	20.60
11	20.00	26.00	22.60
13	24.00	30.00	26.60

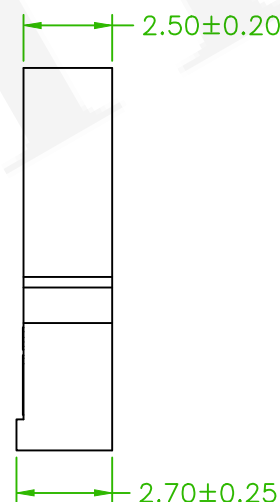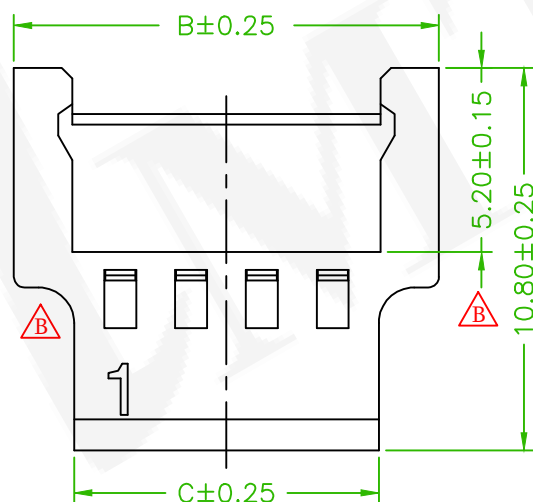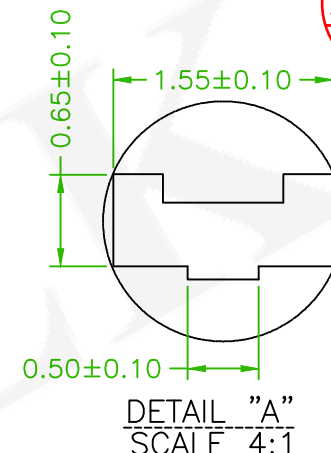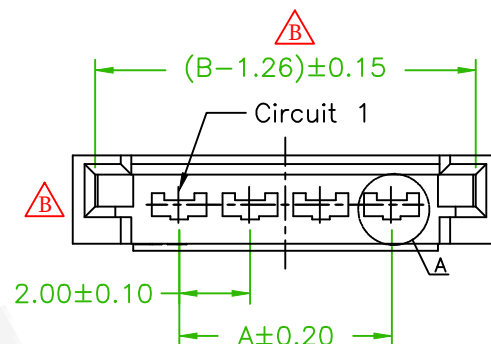

Old Part No.:2009H-MXXW-L



品名 TITLE	2.0mm FEMALE HOUSING				頁數 Page	1/1
品號 PART NO.	5H2009M0-1XXWBL00A01				繪圖 DRAWN	Kent 2007/12/04
圖號 DRAWING NO.	GW090-AZ784		版本 REV.	B	核對 CHECKED	Paul 2007/12/04
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	James 2007/12/04
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15		單位 UNIT	mm	THIRD ANGLE PROJECTION	

ECN NO.:211124 Revise the drawing

Alice

2021/12/07

ECN NO. OR DESCRIPTION

REVISED

DATE