

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 2 0 1 3 N 0 - 1 X X W B L 0 0 B 0 1

Pitch 2.00mm

N:Other

No. of contacts
per row

W:White

B:Bag











RoHS

2-4 Pin

5-9 Pin

10-15 Pin

No. of contacts	Dimensions	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

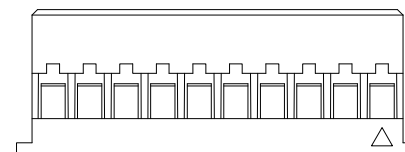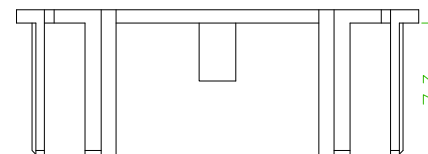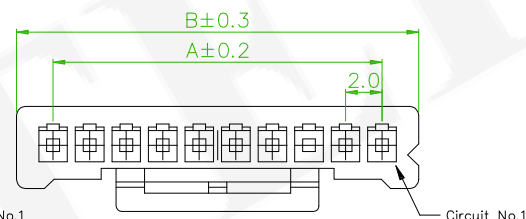

Old Part No.:2013H-XXW-L



REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.0mm HOUSING				頁數 Page	1/1
品號 PART NO.	5H2013N0-1XXWBL00B01				繪圖 DRAWN	Sinnys 2010/05/10
圖號 DRAWING NO.	GW067-EL147	版本 REV.	A	核對 CHECKED	Jenny 2010/05/10	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/05/10	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.30	單位 UNIT	mm	THIRD ANGLE PROJECTION		