

SPECIFICATIONS

Current Rating: 3A AC, DC

Temperature Range: -40°C to +85°C

Contact Resistance: 20mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute






Material: PBT+30%G.F, UL94V-0

ORDER INFORMATION

5 H 2 2 1 7 N 0 - 1 X X X B L 0 0 M 0 1



PIN	Dim. A	Dim. B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
12	27.94	30.48
15	35.56	38.10
18	43.18	45.72
20	48.26	50.80

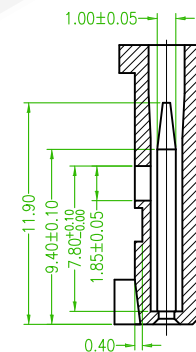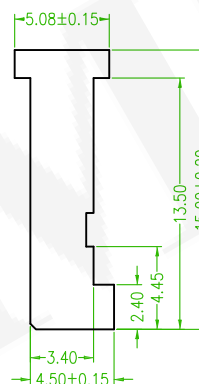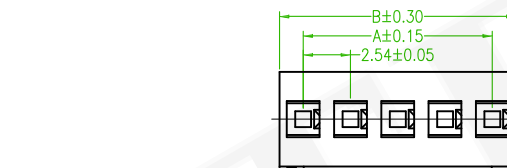


Section A-A



Old Part No.: 2217H-1XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H2217N0-1XXXBL00M01				繪圖 DRAWN	Jeff
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Johnny	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		
						2016/08/30	