

SPECIFICATIONS

Current Rating:3A AC,DC

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Dielectric Voltage: 1000V AC for one minute

Operation Temperature: -25°C to +85°C

MATERIAL

Insulator: PBT+30%G.F,UL94V-0

ORDER INFORMATION

5 H 2 2 1 7 N 0 - 2 X X X B L 0 0 M 0 1

No. of Contacts
per row

U:Blue Insulator
B:Black Insulator


B:Bag Package

RoHS



AMTEK 耀德
2019.10.22
Released DCC

No. of Contacts	Dim. A	Dim. B
2X2	2.54	5.08
2X3	5.08	7.62
2X4	7.62	10.16
2X5	10.16	12.70
2X6	12.70	15.24
2X7	15.24	17.78
2X8	17.78	20.32
2X9	20.32	22.86
2X10	22.86	25.40
 2X11	25.40	27.94
2X12	27.94	30.48
2X15	35.56	38.10
2X18	43.18	45.72
2X20	48.26	50.80

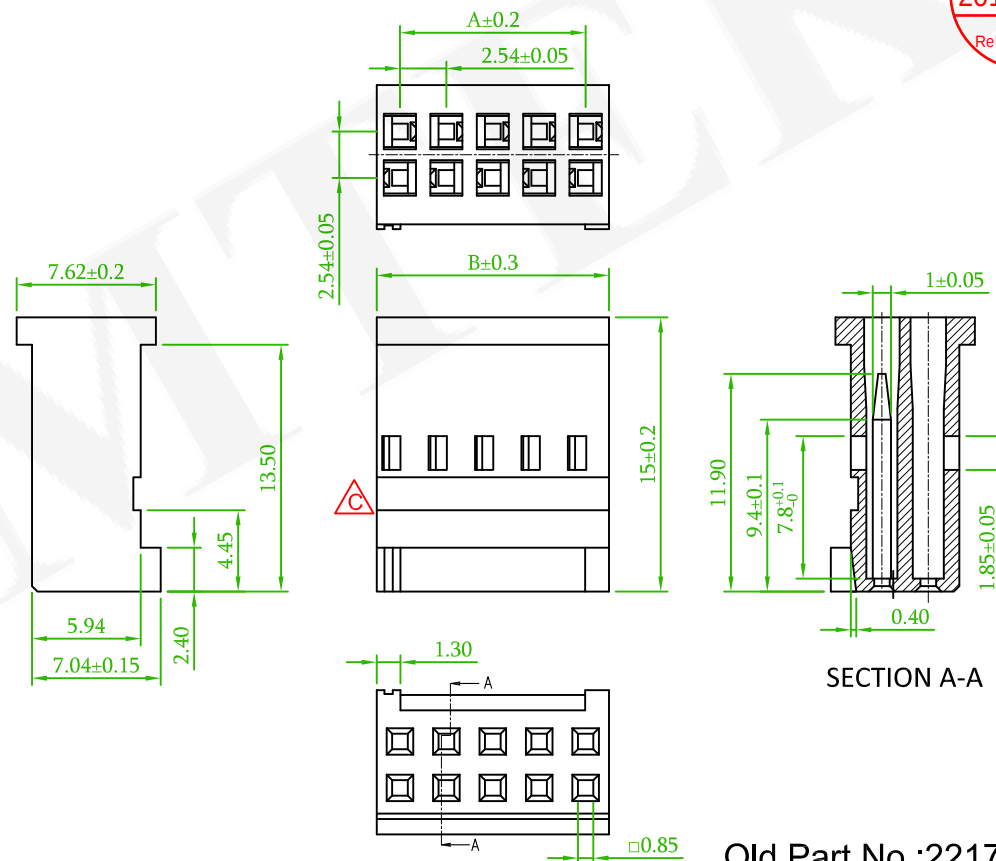

Old Part No.:2217H-2XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 x1	ECR-190913:Revise the Drawing	Nick	2019/10/16
 x1	Add 2x11 Pin.	Gary	2017/10/18



耀德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.54mm HOUSING				頁數 Page	1/1
品號 PART NO.	5H2217N0-2XXXBL00M01				繪圖 DRAWN	Jeff 2016/09/07
圖號 DRAWING NO.	GN003-GA689	版本 REV.	C	核對 CHECKED	Johnny 2016/09/07	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/07	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		