

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 800V AC/minute


Material: Nylon 66,UL94V-0

ORDER INFORMATION

5	H	2	5	0	0	N	0	-	1	X	X	W	B	L	0	0	A	0	1
Pitch 2.50mm			N:Other			No. of contacts per row			W:White			B:Bag			RoHS				



No. of contacts	Dimensions		
	A	B	C
02	2.50	7.25	5.90
03	5.00	9.75	8.40
04	7.50	12.25	10.90
05	10.00	14.75	13.40
06	12.50	17.25	15.90
07	15.00	19.75	18.40
08	17.50	22.25	20.90
09	20.00	24.75	23.40
10	22.50	27.25	25.90
11	25.00	29.75	28.40
12	27.50	32.25	30.90

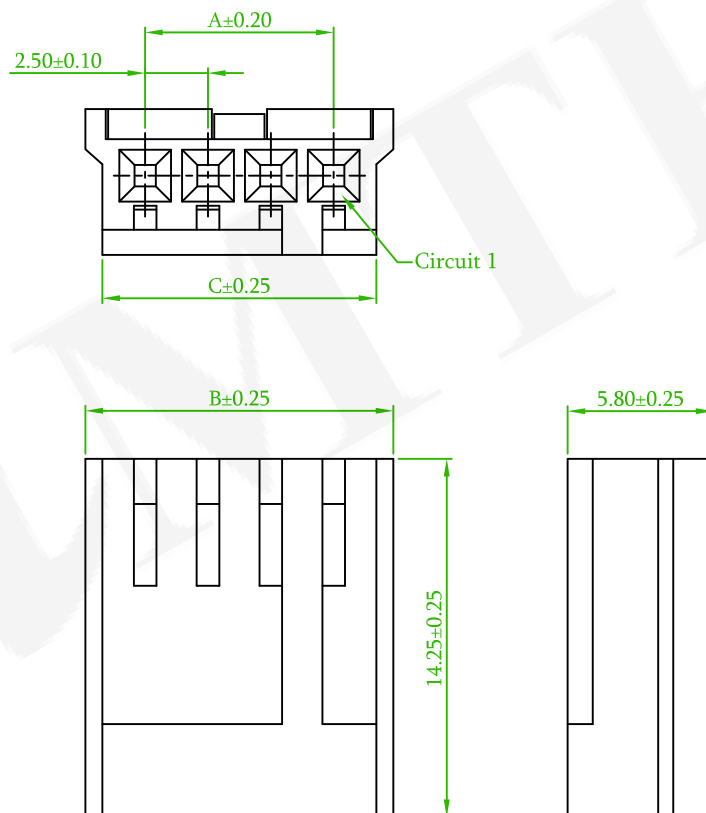

Old Part No.:2500H-XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H2500N0-1XXWBL00A01				繪圖 DRAWN	Roy 2016/08/08
	圖號 DRAWING NO.	GW090-EL 150	版本 REV.	A	核對 CHECKED	Boris 2016/08/08	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/08	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		