

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max 

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute 


Material: Nylon 66,UL94V-0

ORDER INFORMATION

5	H	2	5	0	3	N	0	-	1	X	X	W	B	L	0	0	A	0	1
Pitch 2.50mm				N:Other			No. of contacts per row			W:White		B:Bag		RoHS					



No. of contacts	Dimensions	
	A	B
02	2.50	5.70
03	5.00	8.20
04	7.50	10.70
05	10.00	13.20
06	12.50	15.70
07	15.00	18.20
08	17.50	20.70
09	20.00	23.20
10	22.50	25.70
11	25.00	28.20
12	27.50	30.70
13	30.00	33.20
14	32.50	35.70
15	35.00	38.20
16	37.50	40.70
17	40.00	43.20
18	42.50	45.70
19	45.00	48.20
20	47.50	50.70

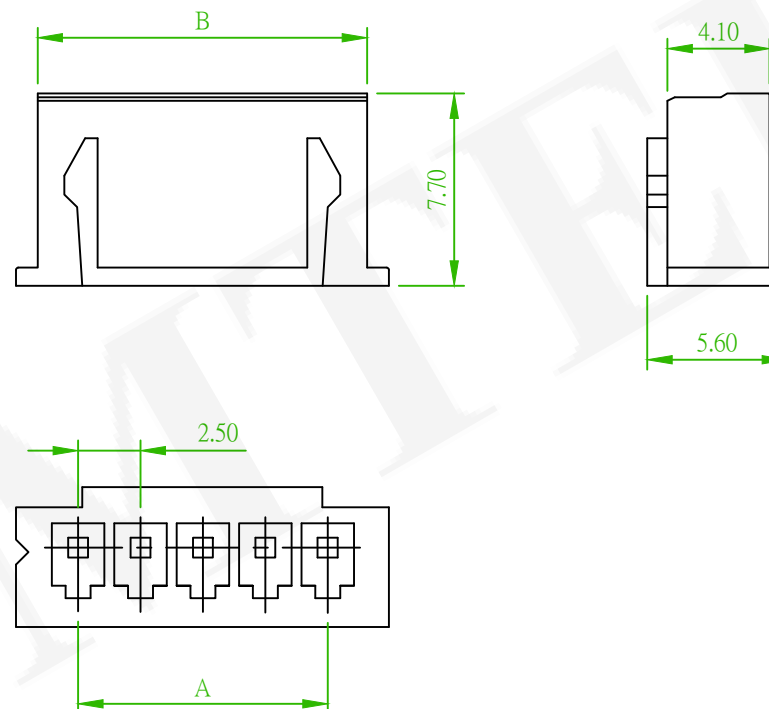

Old Part No.:2503H-XXW-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H2503N0-1XXWBL00A01			繪圖 DRAWN	Kent 2006/03/21	
	圖號 DRAWING NO.	GW090-EL105	版本 REV.	B	核對 CHECKED	Paul 2006/03/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2006/03/21	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

	Add the Specifications	Alice	2022/03/28
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE