

SPECIFICATIONS




Current Rating: 2.5A AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Dielectric Voltage:800V AC for one minute
Material:Nylon 66,UL94V-0

ORDER INFORMATION

5	H	2	5	0	5	N	0	-	1	X	X	W	B	L	0	0	A	0	1
Pitch 2.50mm			N:Other			No. of contacts per row			W:White			B:Bag Package			RoHS				



PART NO.	Dimensions	
	A	B
5H2505N0-102WBL00A01	2.50	7.00
5H2505N0-103WBL00A01	5.00	9.50
5H2505N0-104WBL00A01	7.50	12.00
5H2505N0-105WBL00A01	10.00	14.50
5H2505N0-106WBL00A01	12.50	17.00
5H2505N0-107WBL00A01	15.00	19.50
5H2505N0-108WBL00A01	17.50	22.00
5H2505N0-109WBL00A01	20.00	24.50
5H2505N0-110WBL00A01	22.50	27.00
5H2505N0-111WBL00A01	25.00	29.50
5H2505N0-112WBL00A01	27.50	32.00
5H2505N0-113WBL00A01	30.00	34.50
5H2505N0-114WBL00A01	32.50	37.00
5H2505N0-115WBL00A01	35.00	39.50

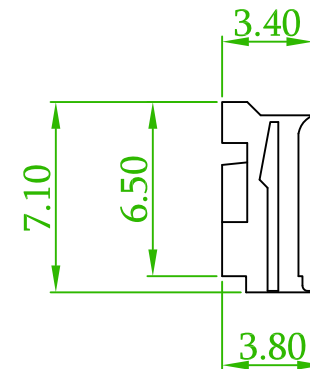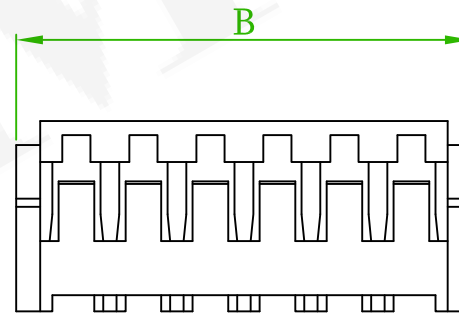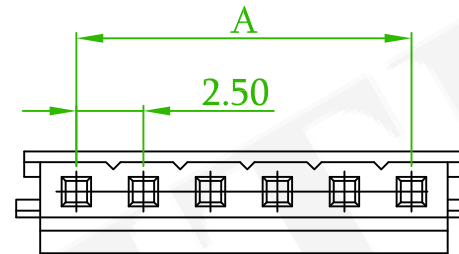

Old Part No.:2505H-XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H2505N0-1XXWBL00A01				繪圖 DRAWN	Mia 2016/09/30
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Jonny 2016/09/30	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/30	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		