

SPECIFICATIONS


Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material:Nylon 66,UL94V-0

ORDER INFORMATION

5	H	2	5	0	6	N	0	-	1	X	X	W	B	L	0	0	A	0	1
Pitch 2.50mm			N:Other			No. of contacts per row			W:Nylon Nature			B:Bag Package			RoHS				



Circuit No.	Dimensions	
	A	B
02P	2.50	5.80
03P	5.00	8.30
04P	7.50	10.80
05P	10.00	13.30
06P	12.50	15.80
07P	15.00	18.30
08P	17.50	20.80
09P	20.00	23.30
10P	22.50	25.80
11P	25.00	28.30
12P	27.50	30.80
13P	30.00	33.30
14P	32.50	35.80
15P	35.00	38.30
16P	37.50	40.80

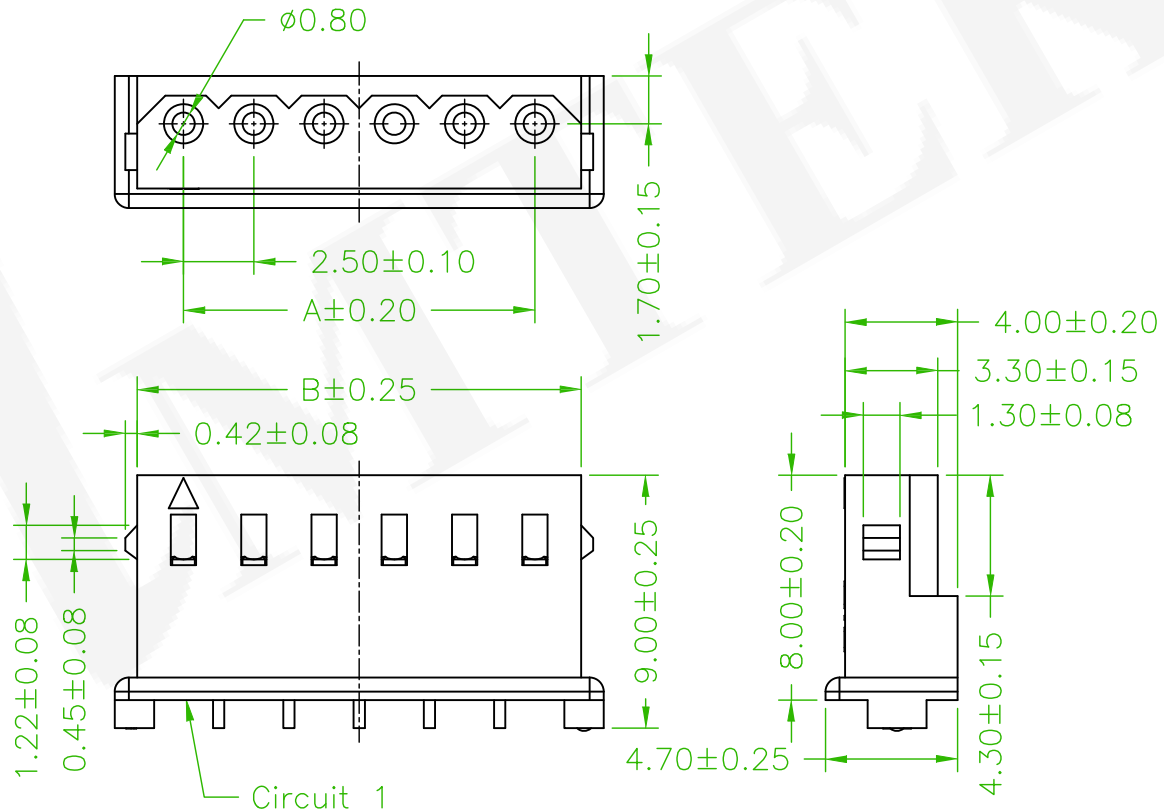

Old Part No.: 2506H-XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	ECN No.:170908, Revised the Color	Killin	2017/09/07

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.50mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H2506N0-1XXWBL00A01				繪圖 DRAWN	Eloise 2016/11/28
	圖號 DRAWING NO.	GW090-JF047	版本 REV.	B	核對 CHECKED	Jonny 2016/11/28	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/28	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		