

SPECIFICATIONS

Current Rating: 3A AC,DC $\triangle_B$

Voltage Rating: 250V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 10mΩ Max $\triangle_A$

Insulation Resistance: 500MΩ Min $\triangle_B$

Withstanding Voltage: 1500V AC/minute $\triangle_B$

Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 2 5 0 7 F 0 - 1 X X X B L 0 0 A 0 1





Pitch 2.50mm

No. of contacts
per row $\triangle_B$

B:Black
W:White $\triangle_B$

B:Bag Package

RoHS

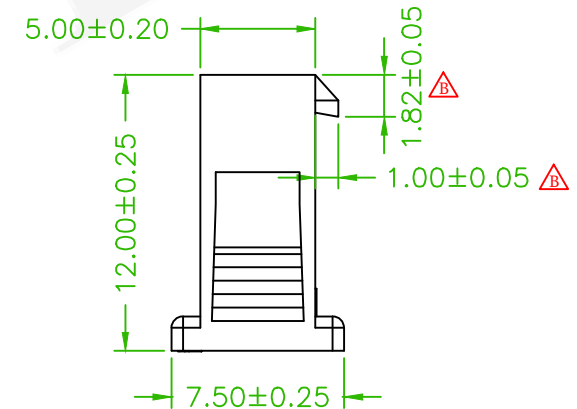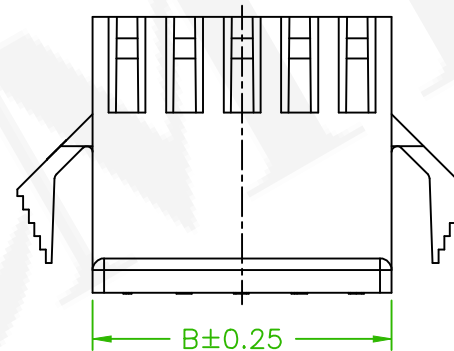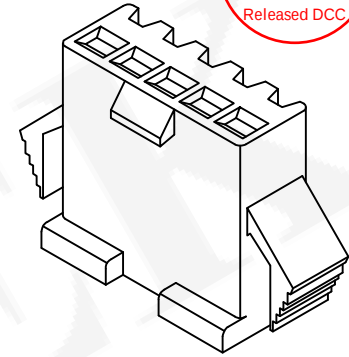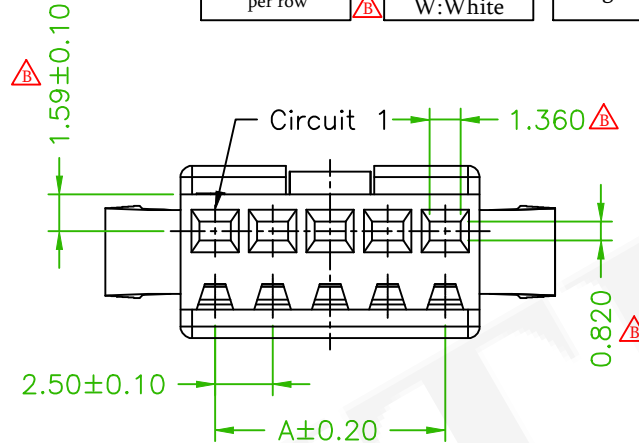

No. of contacts	Dimensions	
	A	B
02	2.50	5.50
03	5.00	8.00
04	7.50	10.50
05	10.00	13.00
06	12.50	15.50
07	15.00	18.00
08	17.50	20.50
09	20.00	23.00
10	22.50	25.50
11	25.00	28.00
12	27.50	30.50

Old Part No.:2507H-FXXB-L



 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	$\triangle_B$ 5H2507F0-1XXXBL00A01				繪圖 DRAWN	Kent 2006/05/08
	圖號 DRAWING NO.	GW090-AZ746				核對 CHECKED	Paul 2006/05/08
	客戶品號 CUSTOMER P/N					承認 APPROVED	James 2006/05/08
	公差 TOLERANCE	.X ± 0.25	版本 REV.	B	比例 SCALE	單位 UNIT	THIRD ANGLE PROJECTION
		.XX ± 0.15		None		mm	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
$\triangle_B$ 12	ECN NO.:211113 Revise the drawing	Alice	2021/11/24