

SPECIFICATIONS

Current Rating: 3A AC,DC Δ

Voltage Rating: 250V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 10mΩ Max Δ

Insulation Resistance: 500MΩ Min Δ

Withstanding Voltage: 1500V AC/minute Δ

Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 2 5 0 7 M 0 - 1 X X X B L 0 0 A 0 1

Pitch 2.50mm

No. of contacts
per row

B:Black
Insulator





W:Natural

B:Bag Package

RoHS



No. of contacts	Dimensions	
	A	B
02	2.50	8.00
03	5.00	10.50
04	7.50	13.00
05	10.00	15.50
06	12.50	18.00
07	15.00	20.50
08	17.50	23.00
09	20.00	25.50
10	22.50	28.00
11	25.00	30.50
12	27.50	33.00

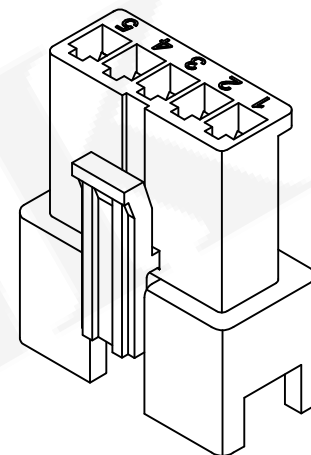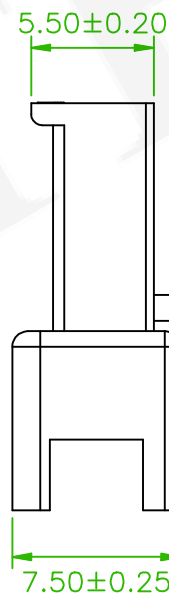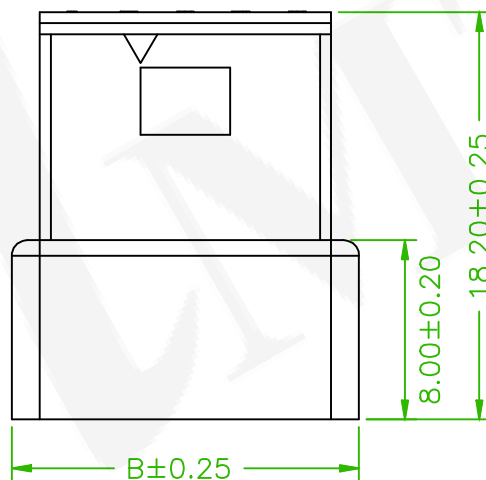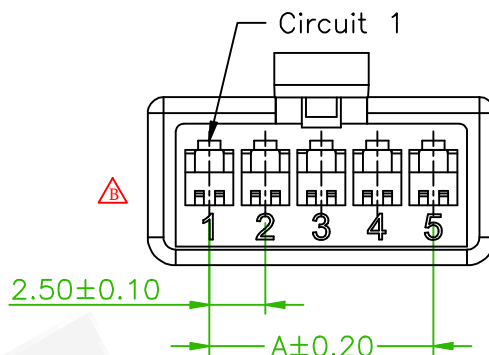

Old Part No.:2507H-MXXB-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Δ x3	Add the White plastic option	Alice	2022/05/04
Δ x5	QEC NO.:211110 Revise the drawing	Alice	2021/11/17

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.5mm HOUSING				頁數 Page	1/1
品號 PART NO.	Δ 5H2507M0-1XXXBL00A01				繪圖 DRAWN	Kent 2006/05/08
圖號 DRAWING NO.	GW090-AZ727	版本 REV.	C	核對 CHECKED	Paul 2006/05/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2006/05/08	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		