

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 500V AC,DC

Temperature Range: -25°C ~ +85°C


Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min




Withstanding Voltage: 1000V AC/minute

Material: PBT,UL94V-0

ORDER INFORMATION

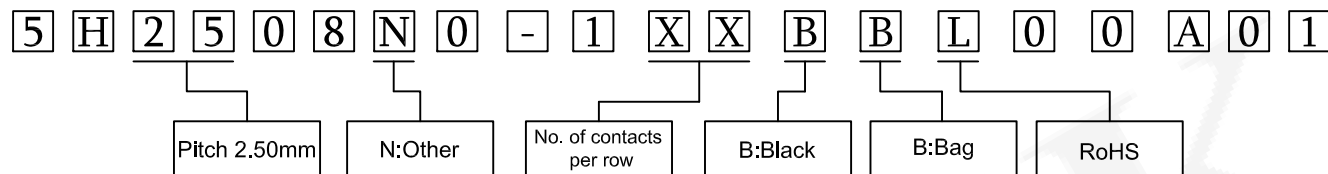

No. of contacts	Dimensions	
	A	B
02	2.50	7.30
03	5.00	9.80
04	7.50	12.30
05	10.00	14.80
06	12.50	17.30
07	15.00	19.80
08	17.50	22.30
09	20.00	24.80
10	22.50	27.30
11	25.00	29.80
12	27.50	32.30
13	30.00	34.80
14	32.50	37.30
15	35.00	39.80

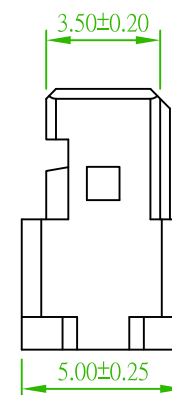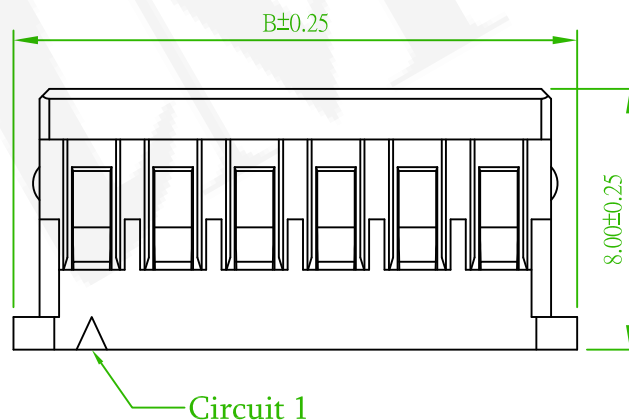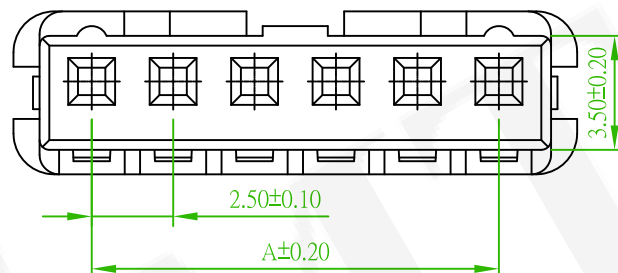

Old Part No.:2508H-XXB-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H2508N0-1XXBBL00A01				繪圖 DRAWN	Kent 2007/04/17
	圖號 DRAWING NO.	GW090-EL069	版本 REV.	A	核對 CHECKED	Paul 2007/04/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/04/17	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		