




SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C to +105°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material:Nylon 66,UL94V-0

ORDER INFORMATION

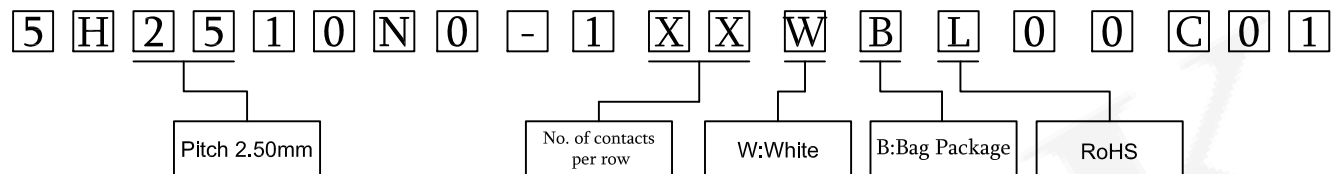

No. of contacts	Dim.A	Dim.B
02	2.50±0.08	5.5
03	5.00±0.10	8.0
04	7.50±0.10	10.5
05	10.00±0.10	13.0
06	12.50±0.10	15.5
07	15.00±0.15	18.0
08	17.50±0.15	20.5
09	20.00±0.15	23.0
10	22.50±0.15	25.5
11	25.00±0.15	28.0
12	27.50±0.20	30.5
13	30.00±0.20	33.0
14	32.50±0.20	35.5
15	35.00±0.25	38.0
16	37.50±0.25	40.5
17	40.00±0.30	43.0
18	42.50±0.30	45.5
19	45.00±0.30	48.0
20	47.50±0.35	50.5

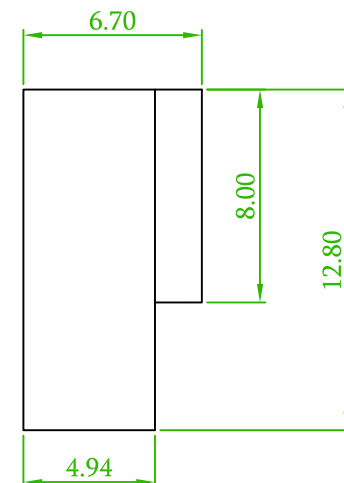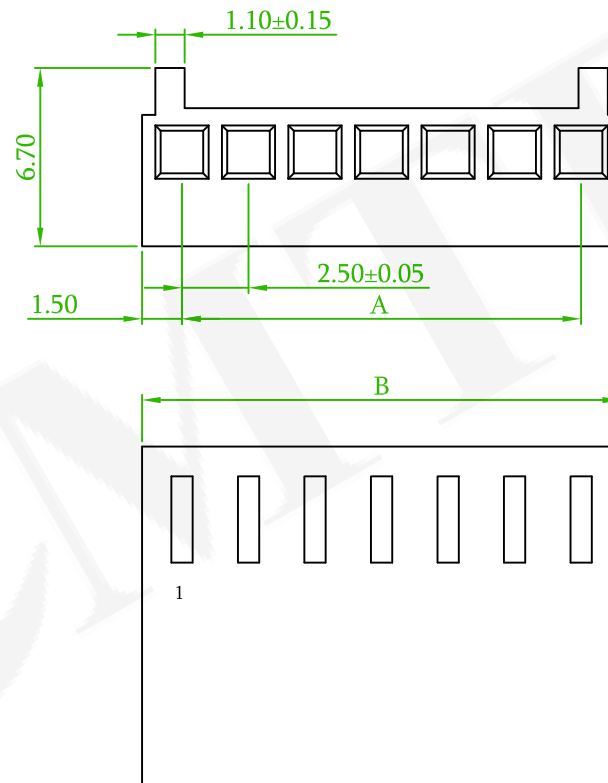

Old Part No.:2510S-XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H2510N0-1XXWBL00C01				繪圖 DRAWN	Mia 2016/06/17
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	David 2016/06/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/06/17	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		