

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C



Contact Resistance: 30mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66 +G.F25% ,UL94V-0

ORDER INFORMATION

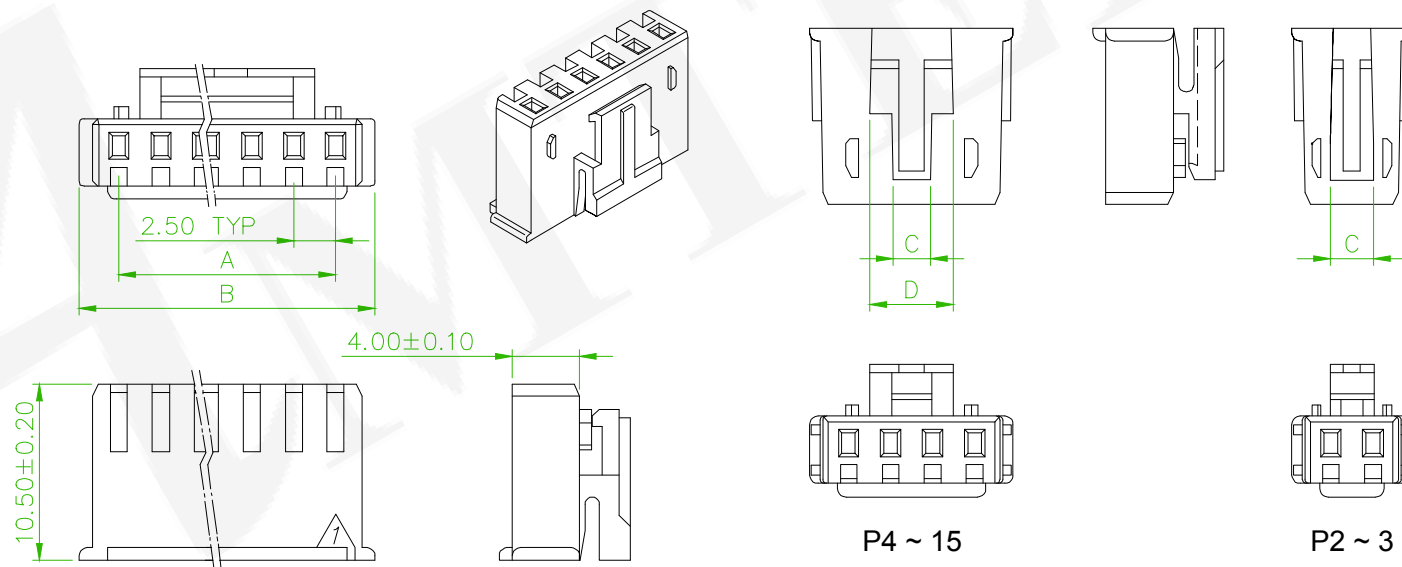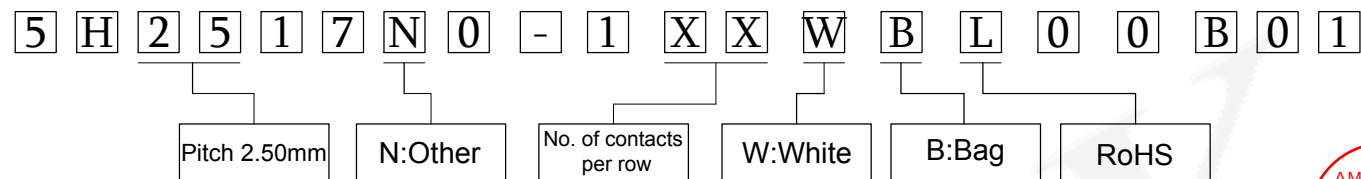

No. of Contacts	A	B	C	D
02	2.50	7.10	2.60	
03	5.00	9.60	2.60	
04	7.50	12.10	2.30	5.00
05	10.00	14.60	4.80	7.50
06	12.50	17.10	7.30	10.00
07	15.00	19.60	9.80	12.50
08	17.50	22.10	12.30	15.00
09	20.00	24.60	12.30	15.00
10	22.50	27.10	12.30	15.00
11	25.00	29.60	12.30	15.00
12	27.50	32.10	12.30	15.00
13	30.00	34.60	12.30	15.00
14	32.50	37.10	12.30	15.00
15	35.00	39.60	12.30	15.00

Old Part No.:2517H-XXW-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H2517N0-1XXWBL00B01				繪圖 DRAWN	Sam 2009/12/03
	圖號 DRAWING NO.	GW067-EL109	版本 REV.	B	核對 CHECKED	Alex 2009/12/03	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/12/03	
	公差 TOLERANCE	$\triangle B \pm 0.3$	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	QEC NO.:200702 Revise the drawing	Alice	2020/08/17
	ECN NO. OR DESCRIPTION	REVISED	DATE