



SPECIFICATIONS

Operation Temperature: -55°C to +150°C

Insulation Resistance: 1000MΩ Min.





Dielectric Voltage: 1500V AC for one minute

MATERIAL

Insulator: Nylon 66

ORDER INFORMATION

5 H 2 5 5 0 N 1 - 1 X X B B L 0 0 P 0 1

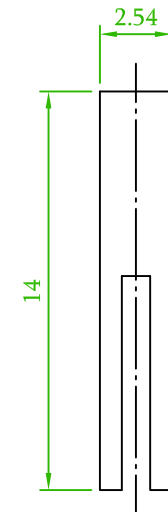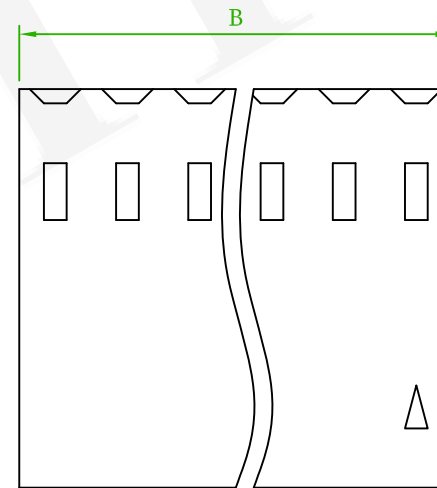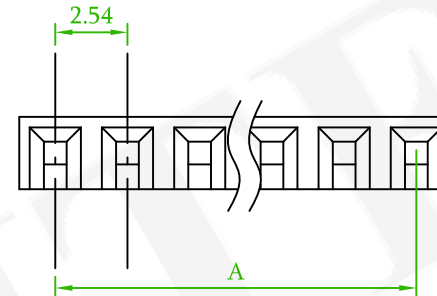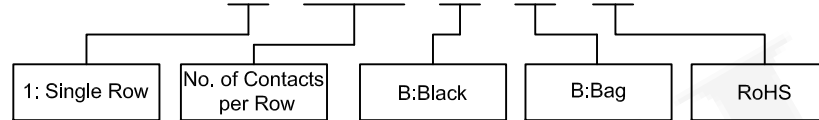

No. of Contacts	Dimensions(mm)	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56

No. of Contacts	Dimensions(mm)	
	A	B
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
32	78.74	81.28

Old P/N: 2550H-XXB-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B-2	QEC:191009 Revise the Dimension	David	2019/10/23

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm HOUSING WIRE SIDE				頁數 Page	1/1
	品號 PART NO.	5H2550N1-1XXBBL00P01				繪圖 DRAWN	Mia 2015/10/14
	圖號 DRAWING NO.	GW024-GB237	版本 REV.	B	核對 CHECKED	Paul 2015/10/14	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2015/10/14	
	公差 TOLERANCE	±0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		