

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Insulation Resistance: 1000MΩ Min

Material: PBT,UL94V-0

ORDER INFORMATION

5 H 2 5 5 0 N 2 - 1 X X B B L 0 0 P 0 1

Pitch 2.54mm




N:Other

No. of contacts
per row


B:Black

B:Bag

RoHS

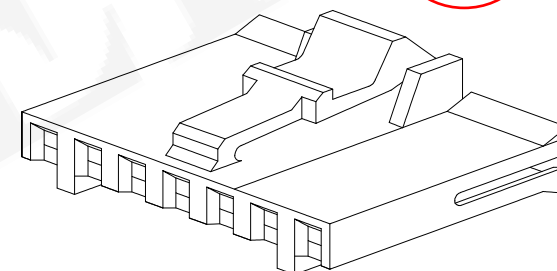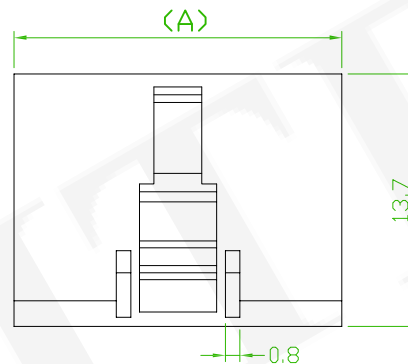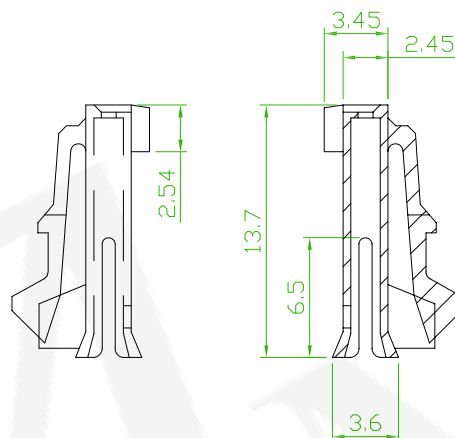

No. of contacts	A	No. of contacts	A	No. of contacts	A
		11	27.94	21	53.34
2	5.08	12	30.48	22	55.88
3	7.62	13	33.02	23	58.42
4	10.16	14	35.56	24	60.96
5	12.70	15	38.10	25	63.50
6	15.24	16	40.46	26	66.04
7	17.78	17	43.18	27	68.58
8	20.32	18	45.72	28	71.12
9	22.86	19	48.26	29	73.66
10	25.40	20	50.80	30	76.20

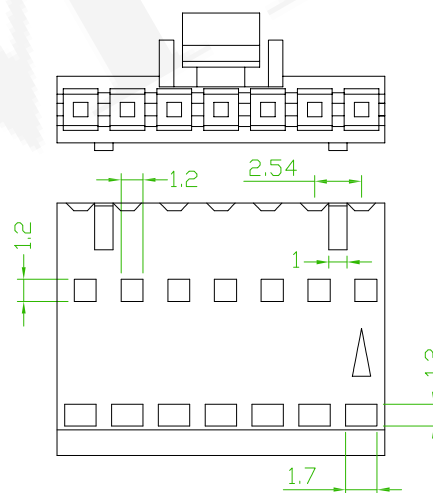

Old Part No.:2550H-XXBH-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.54mm HOUSING				頁數 Page	1/1
品號 PART NO.	5H2550N2-1XXBBL00P01				繪圖 DRAWN	Sinnys 2011/11/04
圖號 DRAWING NO.	GW024-EL119	版本 REV.	A	核對 CHECKED	Paul 2011/11/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2011/11/04	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		