

ORDER INFORMATION

SPECIFICATIONS

Insulation Resistance: 100MΩ Min.

Dielectric Voltage: 1500V AC for one minute

Operation Temperature: -25°C to +85°C

MATERIAL

Insulator:PBT+30%G.F,UL94V-0

5 H 2 5 5 5 N 0 - 2 X X B B L 0 0 G 0 1

No. of Contacts
per Row





B:Black

B:Bag Package

RoHS



Part No.	Dimensions		Part No.	Dimensions	
	A	B		A	B
5H2555N0-203BBL00G01	5.08	7.62	5H2555N0-218BBL00G01	43.18	45.72
5H2555N0-204BBL00G01	7.62	10.16	5H2555N0-219BBL00G01	45.72	48.26
5H2555N0-205BBL00G01	10.16	12.70	5H2555N0-220BBL00G01	48.26	50.80
5H2555N0-206BBL00G01	12.70	15.24	5H2555N0-221BBL00G01	50.80	53.34
5H2555N0-207BBL00G01	15.24	17.78	5H2555N0-222BBL00G01	53.34	55.88
5H2555N0-208BBL00G01	17.78	20.32	5H2555N0-223BBL00G01	55.88	58.42
5H2555N0-209BBL00G01	20.32	22.86	5H2555N0-224BBL00G01	58.42	60.96
5H2555N0-210BBL00G01	22.86	25.40	5H2555N0-225BBL00G01	60.96	63.50
5H2555N0-211BBL00G01	25.40	27.94	5H2555N0-226BBL00G01	63.50	66.04
5H2555N0-212BBL00G01	27.94	30.48	5H2555N0-227BBL00G01	66.04	68.58
5H2555N0-213BBL00G01	30.48	33.02	5H2555N0-228BBL00G01	68.58	71.12
5H2555N0-214BBL00G01	33.02	35.56	5H2555N0-229BBL00G01	71.12	73.66
5H2555N0-215BBL00G01	35.56	38.10	5H2555N0-230BBL00G01	73.66	76.20
5H2555N0-216BBL00G01	38.10	40.64	5H2555N0-231BBL00G01	76.20	78.74
5H2555N0-217BBL00G01	40.64	43.18	5H2555N0-232BBL00G01	78.74	81.28

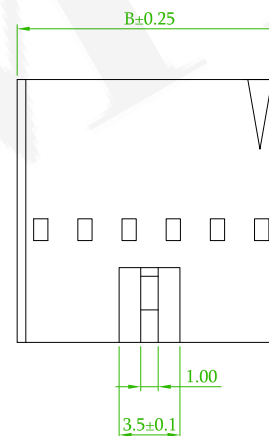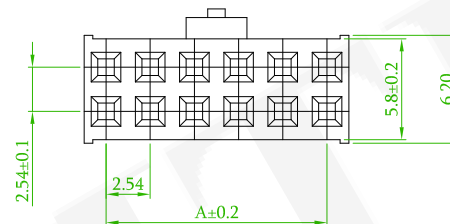

Old Part No.:2555H-2XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm HOUSING			頁數 Page	1/1
	品號 PART NO.	5H2555N0-2XXBBL00G01			繪圖 DRAWN	Roy
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Jonny
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION