

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 1400V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 3800V AC/minute

Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 3 5 0 2 F 0 - 1 0 2 X X L 0 0 A 0 1

Pitch 3.50mm

F:Female





No. of contacts
per row

W:White

B:Bag

RoHS

AMTEK 糧德
2023.10.27
Released DCC

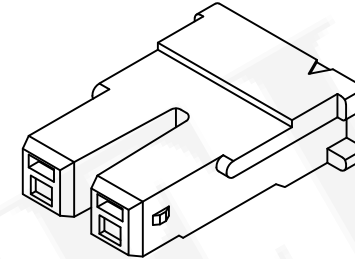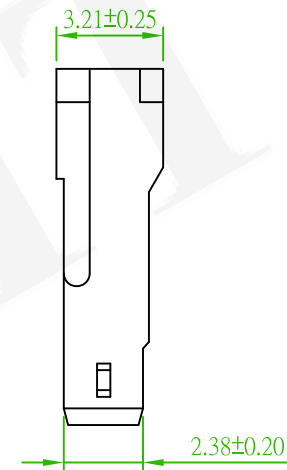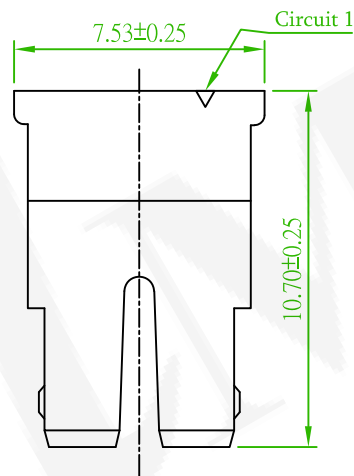

Old Part No.:LCDH-M2PW-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	LCD CONN. 3.50mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H3502F0-102XXL00A01				繪圖 DRAWN	Sinnys 2009/07/28
	圖號 DRAWING NO.	GW090-EL081	版本 REV.	B	核對 CHECKED	Paul 2007/03/09	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/03/09	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

ECN NO.: 230923 Revise the drawing

Alice

2023/10/16

REV. ECN NO. OR DESCRIPTION

REVISED

DATE