

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 1400V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 3800V AC/minute
Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 3 5 0 2 M 0 - 2 X X X X L 0 0 A 0 1

Pitch 3.50mm





M:Male

No. of contacts
per row

W:White

B:Bag

RoHS

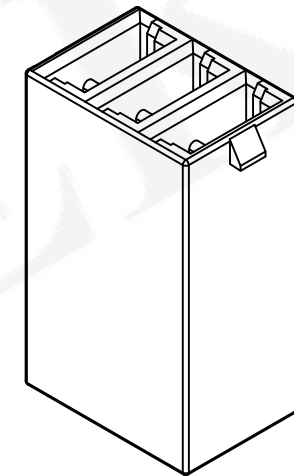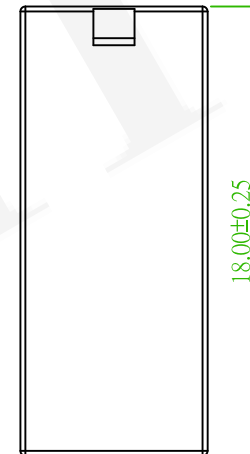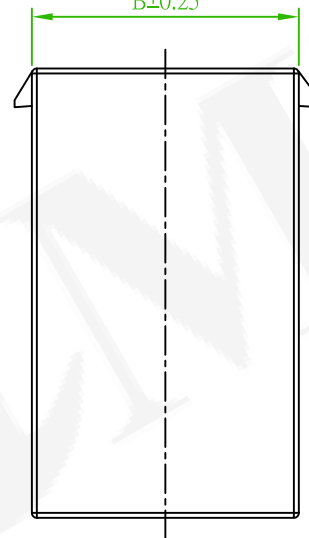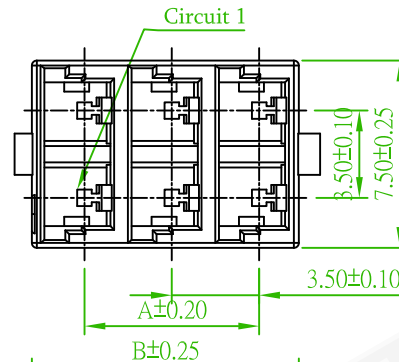

No. of contacts	Dimensions	
	A	B
03	7.00	10.70
06	17.50	21.20

Old Part No.:LCDH-M2PXXW-L

△	ECN NO.: 230923 Revise the drawing	Alice	2023/10/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		LCD CONN. 3.50mm HOUSING				頁數 Page	1/1
品號 PART NO.		△ 5H3502M0-2XXXXL00A01		繪圖 DRAWN		Sinnys 2009/07/28	
圖號 DRAWING NO.		GW090-EL089		版本 REV.		核對 CHECKED	
客戶品號 CUSTOMER P/N				比例 SCALE		承認 APPROVED	
公差 TOLERANCE		.X ± 0.35 .XX ± 0.25		單位 UNIT		THIRD ANGLE PROJECTION	
				B		Paul 2009/07/28	
				None		James 2009/07/28	
				mm		⊕	