

SPECIFICATIONS


Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-2

ORDER INFORMATION

5	H	3	9	6	1	N	X	-	1	X	X	W	B	L	0	0	A	0	1
Pitch 3.96mm			0:TYPE 0 1:TYPE 1		1:Single Row		No. of contacts per row		W:White		B:Bag Package		RoHS						



No.of contacts	Dimensions	
	Dim.A	Dim.B
102	3.96	8.43
103	7.92	12.39
104	11.88	16.35
105	15.84	20.31
106	19.80	24.27
107	23.76	28.23
108	27.72	32.19
109	31.68	36.15
110	35.64	40.11
111	39.60	44.07
112	43.56	48.03
113	47.52	51.99
114	51.48	55.95
115	55.44	59.91
116	59.40	63.87
117	63.36	67.83
118	67.32	71.79
119	71.28	75.75
120	75.24	79.71

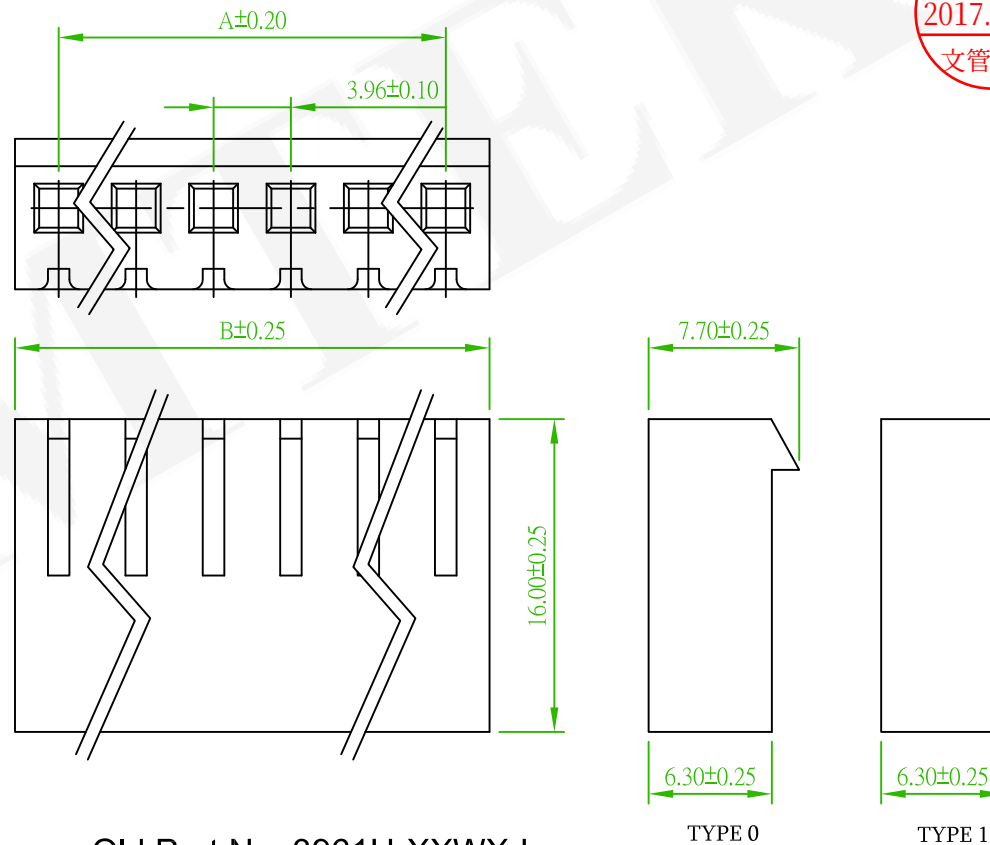

Old Part No.:3961H-XXWX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	3.96mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H3961NX-1XXWBL00A01				繪圖 DRAWN	Jeff 2016/10/05
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Johnny 2016/10/05	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/05	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		