

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2

ORDER INFORMATION

5	H	3	9	6	6	N	0	-	1	X	X	W	B	L	0	0	A	0	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Pitch 3.96mm

N:Other

No. of contacts
per row


W:White

B:Bag

RoHS




Circuit 1

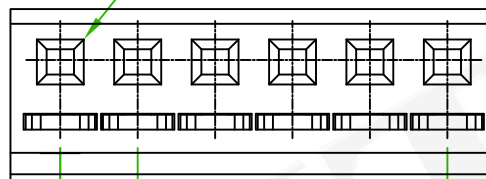

3.96±0.10

A±0.20

B±0.25

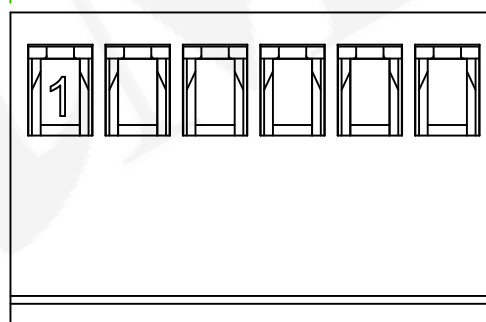

16.00±0.25

7.35±0.25

1.50±0.20

8.10±0.25

No.of contacts	Dimensions	
	A	B
02	3.96	9.06
03	7.92	13.02
04	11.88	16.98
05	15.84	20.94
06	19.80	24.90
07	23.76	28.86
08	27.72	32.82
09	31.68	36.78
10	35.64	40.74
11	39.60	44.70
12	43.56	48.66



Old Part No.:3966H-XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	3.96mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H3966N0-1XXWBL00A01				繪圖 DRAWN	Sinnys 2009/02/11
	圖號 DRAWING NO.	GW090-EL065	版本 REV.	A	核對 CHECKED	Paul 2009/02/11	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/02/11	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.30	單位 UNIT	mm	THIRD ANGLE PROJECTION		