

SPECIFICATIONS


Current Rating:9A AC, DC
Voltage Rating:600V AC,DC
Temperature Range:-40°C~+105°C
Contacts Resistance:20mΩ Max.
Insulation Resistance:1000MΩ min.
Withstand Voltage:1500V AC/minute
Material:Nylon 66 UL94V-2

ORDER INFORMATION



5	H	4	1	4	0	F	X	-	1	X	X	W	B	L	0	0	G	0	1
Pitch 4.14mm			0:W/O EAR (Only 1Pin) 1:WITH EAR			1:Single Row		No. of contacts per row		W:White			B:Bag Package		RoHS				





Part No.	Dimensions(mm)			Ear
	A	B	C	
5H4140F0-101***	—	5.80	8.10	W/O
5H4140F1-102***	4.14	9.80	11.80	With
5H4140F1-103***	8.28	14.00	16.00	

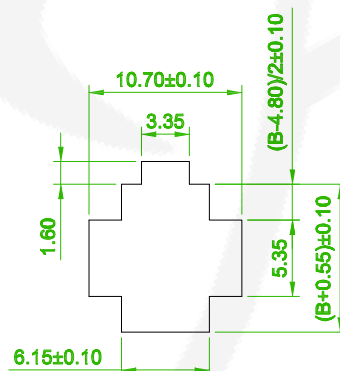


Panel hole layout
(2P~3P)

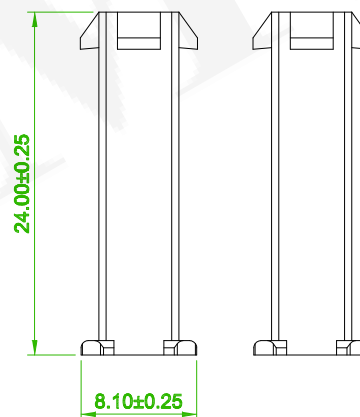

1P

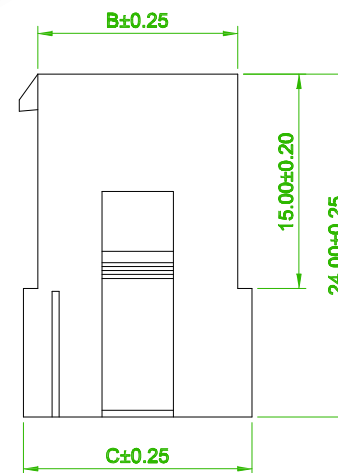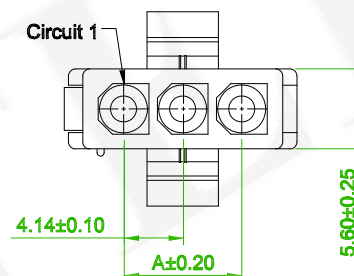

2P~3P

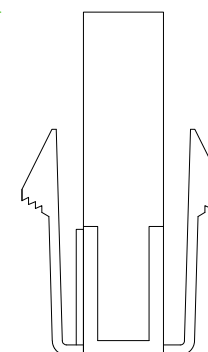

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	4.14mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H4140FX-1XXWBL00G01				繪圖 DRAWN	Nick 2019/11/08
	圖號 DRAWING NO.	GN014-NI499	版本 REV.	A	核對 CHECKED	Josh 2019/11/08	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/11/08	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		