

SPECIFICATIONS

Current Rating:9A AC, DC
Voltage Rating:600V AC,DC
Temperature Range:-40°C~+105°C
Contacts Resistance:20mΩ Max.
Insulation Resistance:1000MΩ min.
Withstand Voltage:1500V AC/minute
Material:Nylon 66 UL94V-2

ORDER INFORMATION

5 H 4 1 4 0 M 0 - 1 X X W B L 0 0 G 0 1

Pitch 4.14mm

0:W/O Ears

1:Single Row

No. of contacts
per row

W:Natural

B:Bag Package


RoHS

AMTEK 糧德

2023.10.13

Released DCC

No. of contacts	Dimensions(mm)		
	A	B	C
1P	---	5.76	7.00
2P	4.14	9.90	11.14
3P	8.28	14.04	15.28

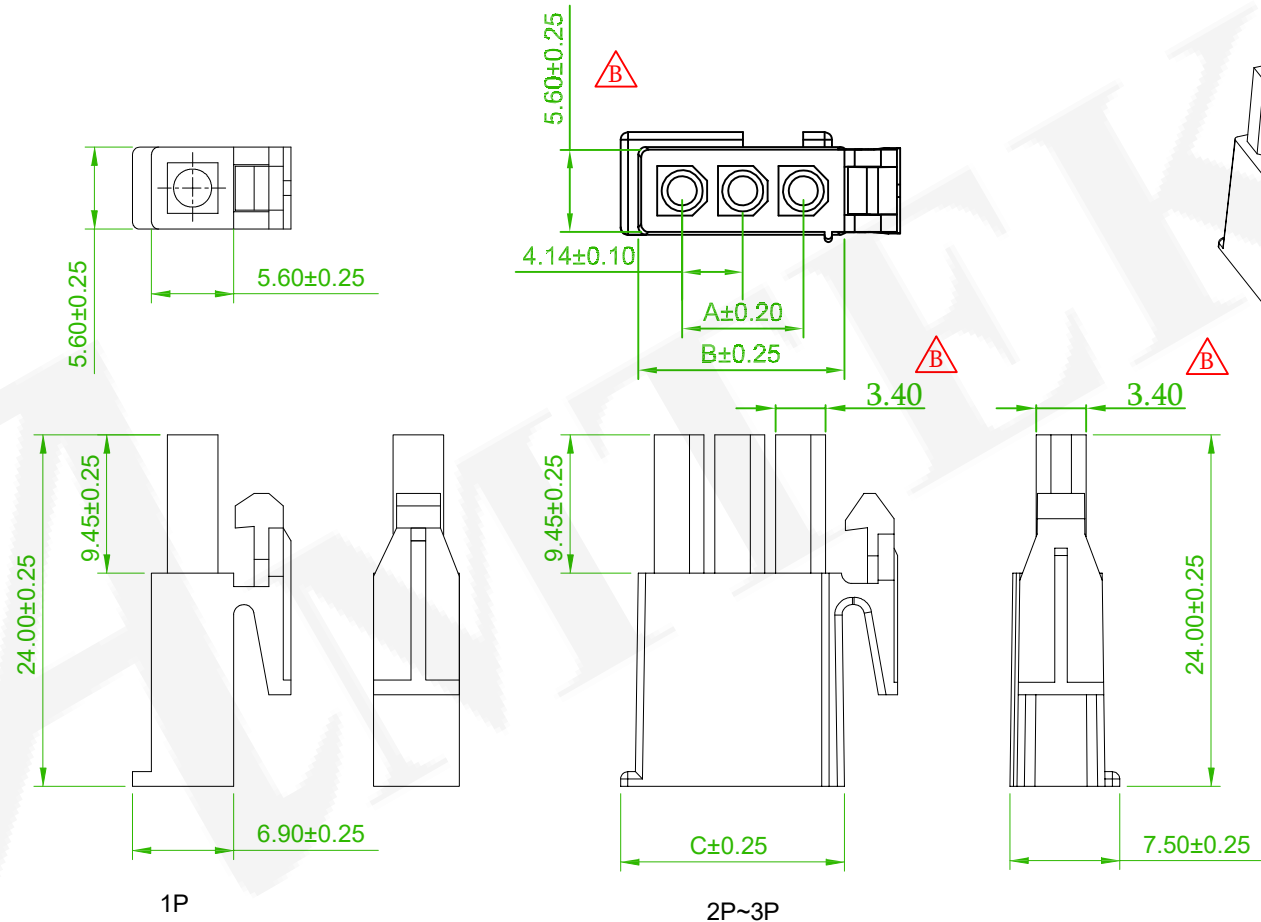

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	4.14mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H4140M0-1XXWBL00G01				繪圖 DRAWN	Nick 2019/10/16
	圖號 DRAWING NO.	GN014-NI440	版本 REV.	B	核對 CHECKED	Josh 2019/10/16	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/10/16	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

ECN NO.:230914 Revise the drawing

Gaby

2023/10/02

ECN NO. OR DESCRIPTION

REVISED

DATE