

Current Rating:9A AC, DC
Voltage Rating:600V AC,DC
Temperature Range:-40°C~+105°C
Contacts Resistance:20mΩ Max.
Insulation Resistance:1000MΩ min.
Withstand Voltage:1500V AC/minute
Material:Nylon 66 UL94V-0

5 H 4 1 4 0 M 0 - 3 X X W B L 0 0 G 0 1




Pitch 4,14mm 0:W/O Ears 3:Triple Row No. of contacts per row W:Natural B:Bag Package RoHS



(2019.11.08

Released DCC

No. of contacts	Dimensions(mm)	
	A	B
3 Pin	8.28	14.00
4 Pin	12.42	18.50
5 Pin	16.56	22.65

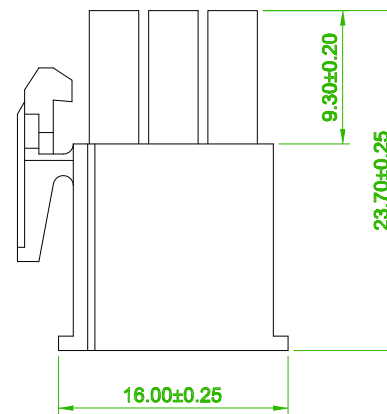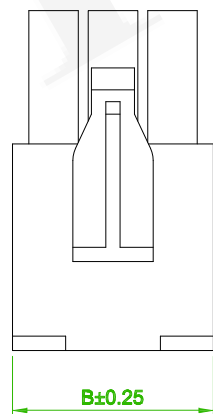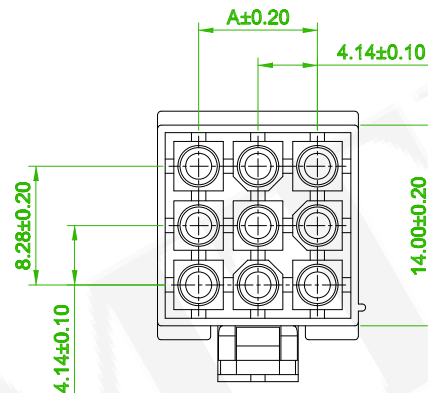

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	4.14mm HOUSING				頁數 Page	1/1
品號 PART NO.	5H4140M0-3XXWBL00G01			繪圖 DRAWN	Nick 2019/11/08	
圖號 DRAWING NO.	GN014-NI498	版本 REV.	A	核對 CHECKED	Josh 2019/11/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/11/08	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		