

SPECIFICATIONS

Current Rating: 10A AC,DC $\triangle B$

Voltage Rating: 300V AC,DC $\triangle B$

Temperature Range: -25°C to +85°C

Contact Resistance: 7mΩ Max $\triangle B$

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 4 5 0 0 X 0 - 1 X X W B L 0 0 A 0 1

Pitch 4.50mm

F:Female
M:Male

No. of contacts
per row

W:White

B:Bag Package


RoHS




AMTEK 緯德

2019.09.09


Released DCC




5H4500F0-102




5H4500F0-103




5H4500F0-104

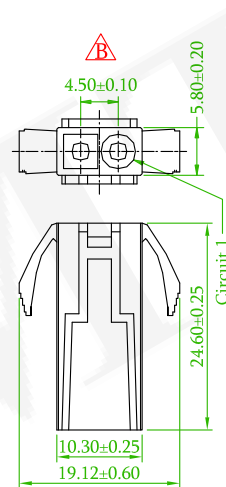

5H4500M0-102

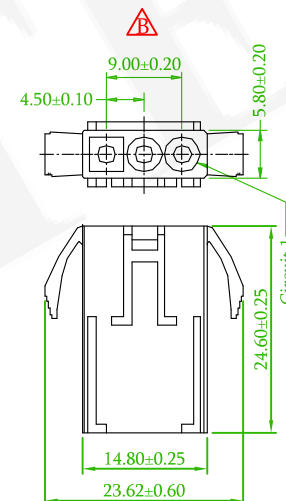

5H4500M0-103

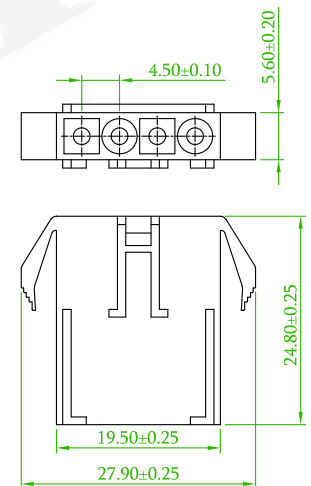

5H4500M0-104

Old Part No.:4500H-X1XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
$\triangle B$ x1	QEC NO.190902: Revise the Dimension	Benson	2019/09/04
$\triangle B$ x4	QEC NO.190402: Revise the Dimension and Drawing and Info.	Daniel	2019/04/25

 緯德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	4.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H4500X0-1XXWBL00A01				繪圖 DRAWN	Kent 2007/02/12
	圖號 DRAWING NO.	GW090-DA122	版本 REV.	C	核對 CHECKED	Josh 2019/04/25	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/04/25	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		