

SPECIFICATIONS

Current Rating: 5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 10mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute


Material: Nylon 66,UL94V-0

ORDER INFORMATION




5	H	4	5	0	0	X	0	-	2	X	X	W	B	L	0	0	A	0	1
Pitch 4.50mm				F:Female M:Male		No. of contacts per row		W:White		B:Bag Package		RoHS							





5H4500F0-202




5H4500F0-203

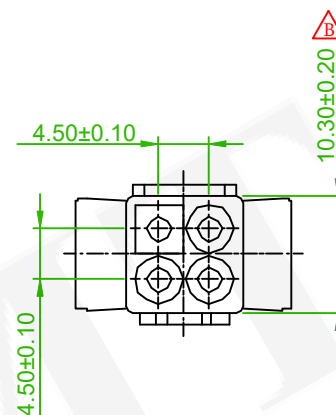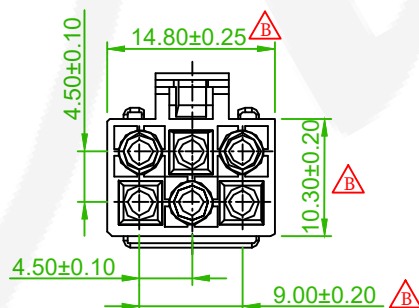

5H4500M0-202

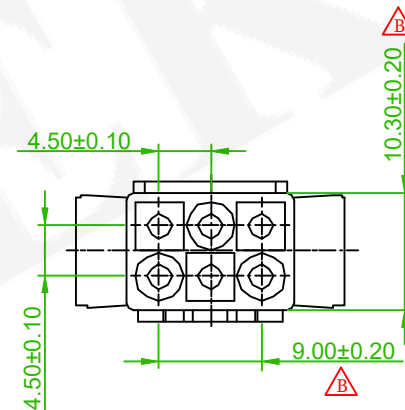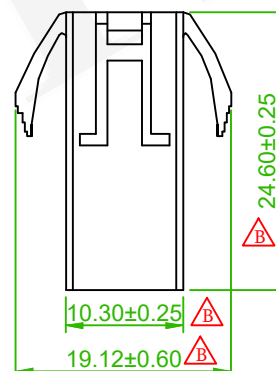

5H4500M0-203

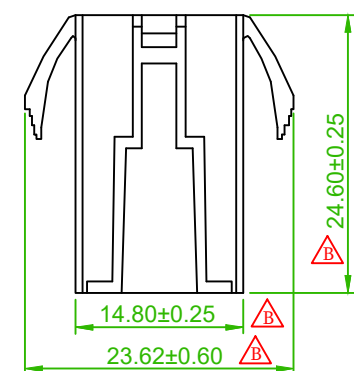

Old Part No.:4500H-X2XXW-L



品名 TITLE	4.5mm HOUSING				頁數 Page	1/1
品號 PART NO.	5H4500X0-2XXWBL00A01				繪圖 DRAWN	Kent 02/12/2007
圖號 DRAWING NO.	GW090-AZ018	版本 REV.	B	核對 CHECKED	Paul 02/12/2007	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 02/12/2007	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△B x18	ECN No:210327 Revise the drawing	Alice	2021/4/22