


SPECIFICATIONS

Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0

ORDER INFORMATION

5	H	4	5	0	0	X	0	-	3	X	X	W	B	L	0	0	A	0	1
Pitch 4.50mm				F:Female M:Male		No. of contacts per row			W:White		B:Bag Package		RoHS						

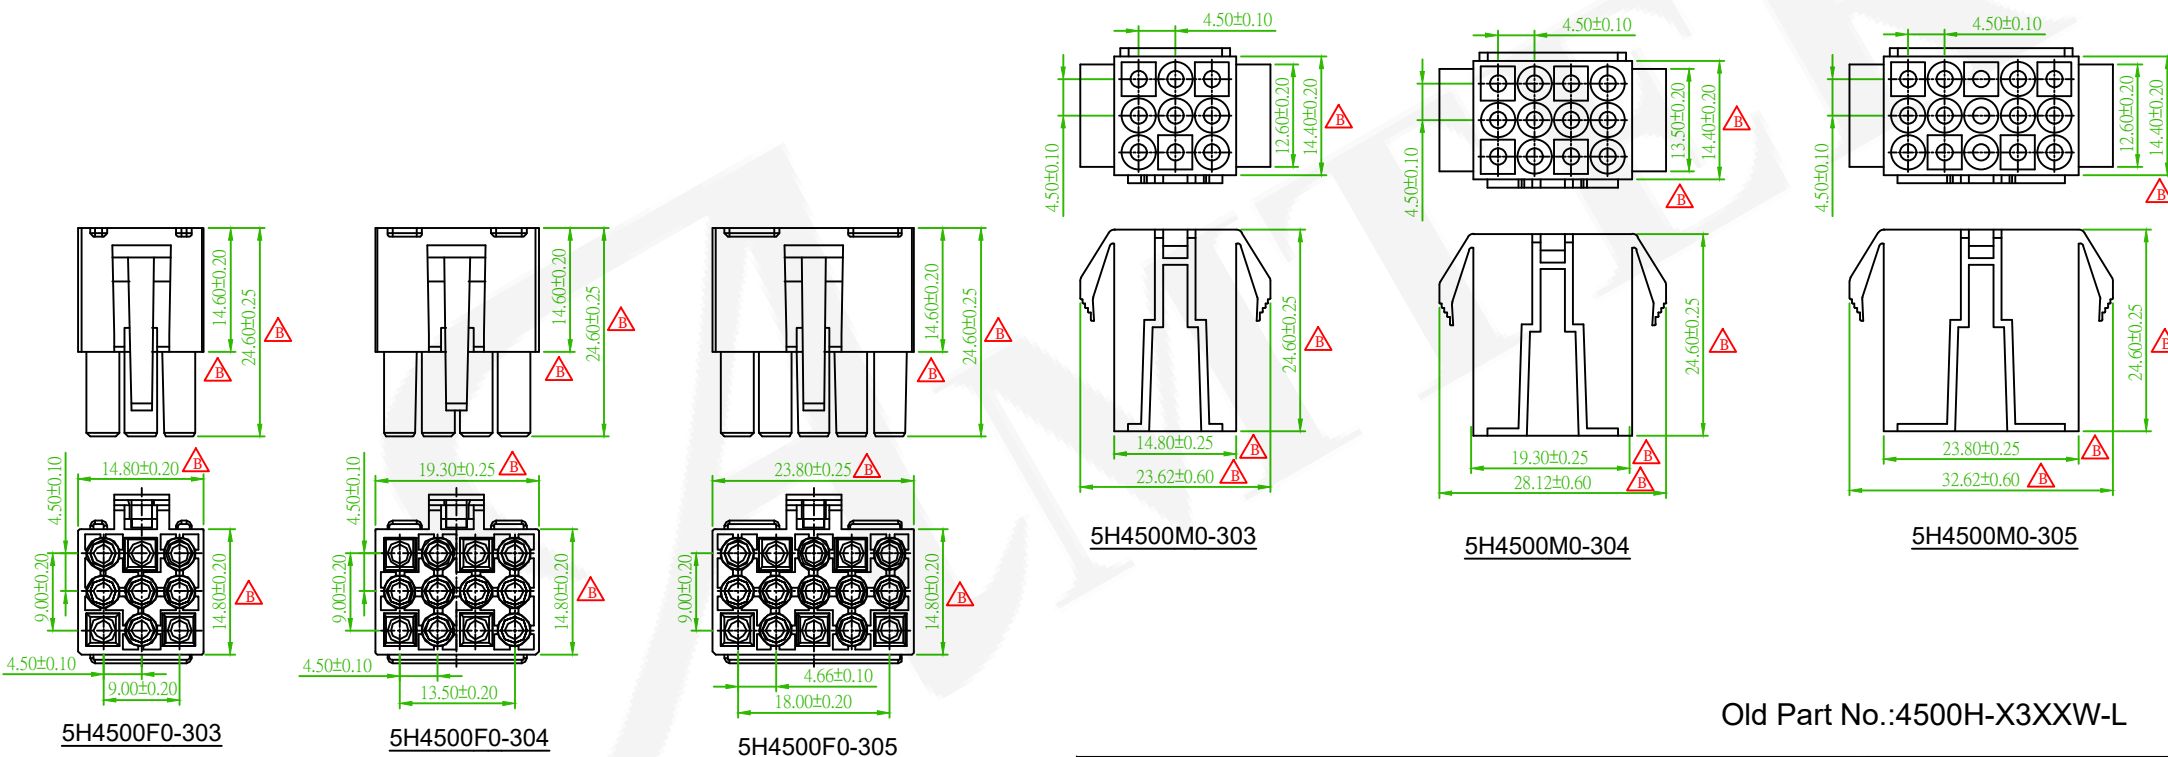

Old Part No.:4500H-X3XXW-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	4.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H4500X0-3XXWBL00A01			繪圖 DRAWN	Kent 02/12/2007	
	圖號 DRAWING NO.	GW090-AZ692	版本 REV.	B	核對 CHECKED	Paul 02/12/2007	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 02/12/2007	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	QEC NO.:211010 Revise the drawing	Alice	2021/11/08
	ECN NO. OR DESCRIPTION	REVISED	DATE