

SPECIFICATIONS






Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩMin
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-2

ORDER INFORMATION

5	H	5	0	3	0	F	X	-	1	X	X	B	B	L	0	0	A	0	1	
Pitch 5.03mm				F:Female		0:W/O Ear 1:With Ear		No. of contacts per row			B:Black		B:Bag Package			RoHS				



Amtek
2017.08.29
文管中心

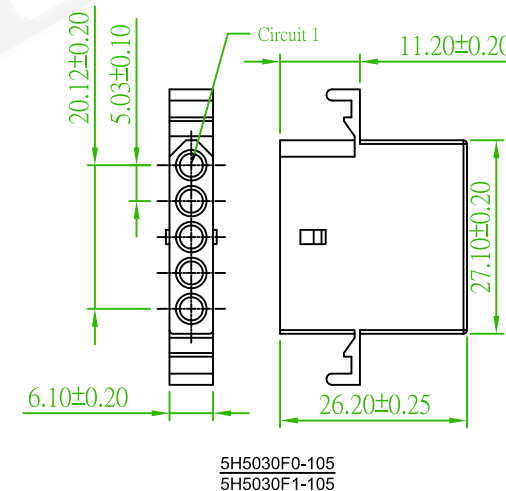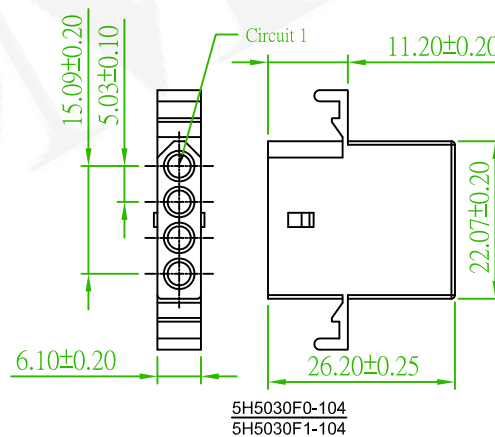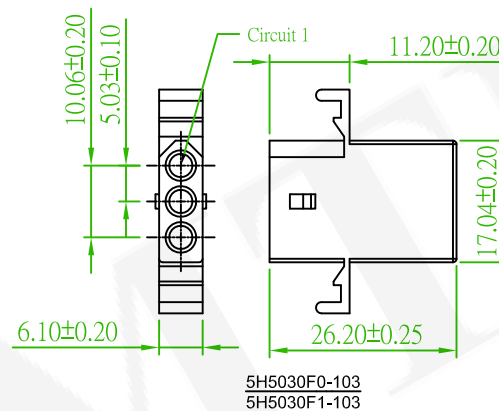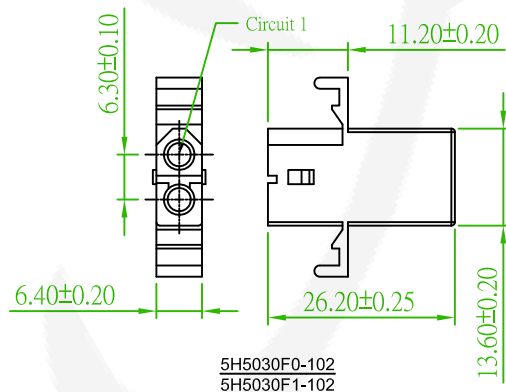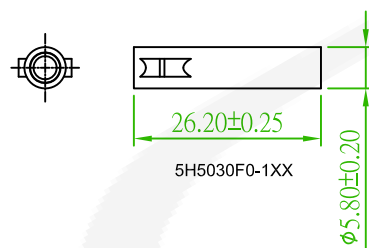

Old Part No.:5030H-M1XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.03mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H5030FX-1XXWBL00A01				繪圖 DRAWN	Kent 2007/10/04
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Paul 2007/10/04	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/10/04	
	公差 TOLERANCE	.X ±0.35 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		