

SPECIFICATION



Temperature Range: -25°C ~ +85°C
Insulation Resistance: 1000M Ω Min
Dielectric Voltage: 1500V AC/minute

MATERIAL



Insulator: Nylon 66, UL94V-2

ORDER INFORMATION

5	H	5	0	3	0	F	X	-	2	0	2	W	B	L	0	0	A	0	1
503:Pitch 5.03mm				F:Female			0:W/O Ear 1:With Ear	No. of contacts per row			W:Natural		B:Bag		RoHS				

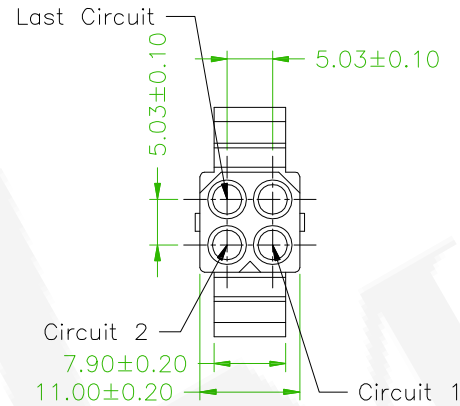

5H5030F1-202WBL00A01
2x2 Pin With Ear

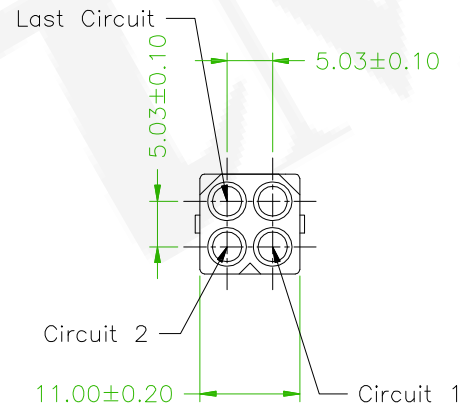

5H5030F0-202WBL00A01
2x2 Pin W/O Ear



REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.03mm PITCH HOUSING				頁數 Page	1/1
	品號 PART NO.	5H5030FX-202WBL00A01				繪圖 DRAWN	Benson 2020/01/16
	圖號 DRAWING NO.	GW090-BS762	版本 REV.	A	核對 CHECKED	Josh 2020/01/16	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/01/16	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		