

SPECIFICATION

Temperature Range: -25°C ~ +85°C
Insulation Resistance: 1000MΩ Min
Dielectric Voltage: 1500V AC/minute

MATERIAL

Insulator: Nylon 66, UL94V-2

ORDER INFORMATION

5 H 5 0 3 0 F X - 3 X X W B L 0 0 A 0 1

503:Pitch 5.03mm

F:Female










0:W/O Ear
1:With Ear

No. of contacts
per row(02-05)

W:White

B:Bag

RoHS

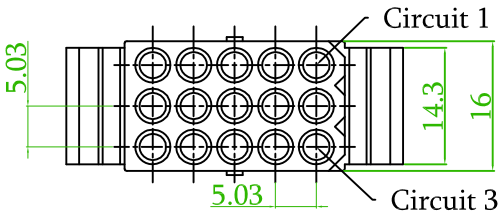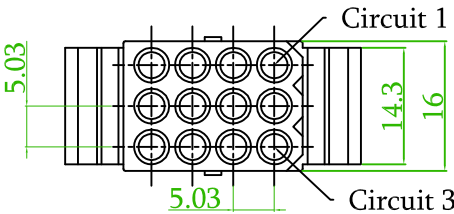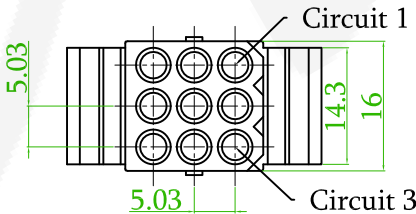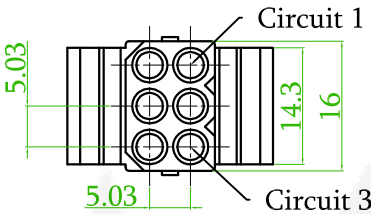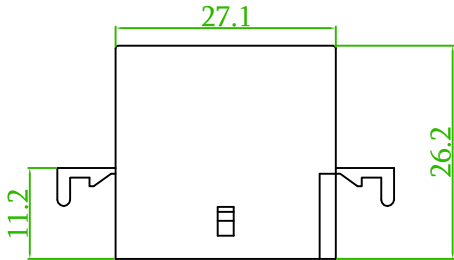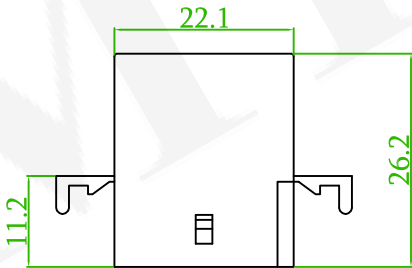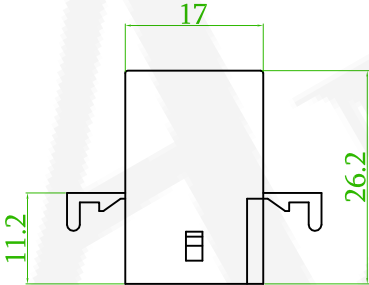

3X2 PIN

3X3 PIN

3X4 PIN

3X5 PIN

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.03mm PITCH HOUSING				頁數 Page	1/1
	品號 PART NO.	5H5030FX-3XXWBL00A01				繪圖 DRAWN	Gary 2017/07/05
	圖號 DRAWING NO.	GW090-GA460	版本 REV.	A	核對 CHECKED	承認 APPROVED	Carol 2017/07/05
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	承認 APPROVED	Jason 2017/07/05
	公差 TOLERANCE	.X ±0.3 .XX ±0.2	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	