

SPECIFICATION

Temperature Range: -25°C ~ +85°C
Insulation Resistance: 1000M Ω Min
Dielectric Voltage: 1500V AC/minute

MATERIAL

Insulator: Nylon 66, UL94V-2

ORDER INFORMATION

5 H 5 0 3 0 M X - 2 0 2 W B L 0 0 A 0 1

503:Pitch 5.03mm

F:Female



0:W/O Ear
1:With Ear

No. of contacts
per row



W:Natural

B:Bag

RoHS

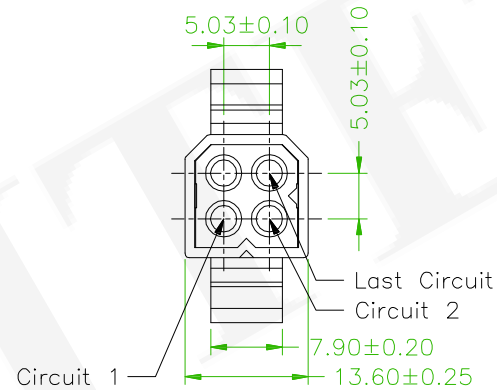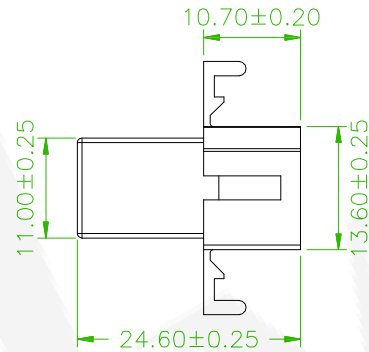

5H5030M1-202WBL00A01
2x2 Pin With Ear

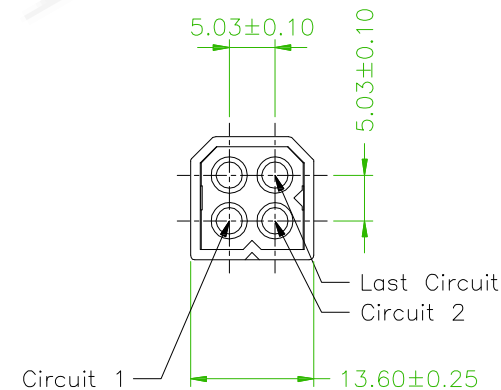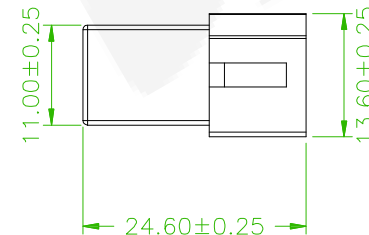

5H5030M0-202WBL00A01
2x2 Pin W/O Ear

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.03mm PITCH HOUSING			頁數 Page	1/1
	品號 PART NO.	5H5030MX-202WBL00A01			繪圖 DRAWN	Benson 2020/01/16
	圖號 DRAWING NO.	GW090-BS763	版本 REV.	A	核對 CHECKED	Josh 2020/01/16
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/01/16
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	