

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2

ORDER INFORMATION

5	H	5	0	8	2	M	0	-	1	0	4	W	B	L	0	0	A	0	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Pitch 5.08mm


M:Male Type

No. of contacts
per row

W:White

B:Bag

RoHS

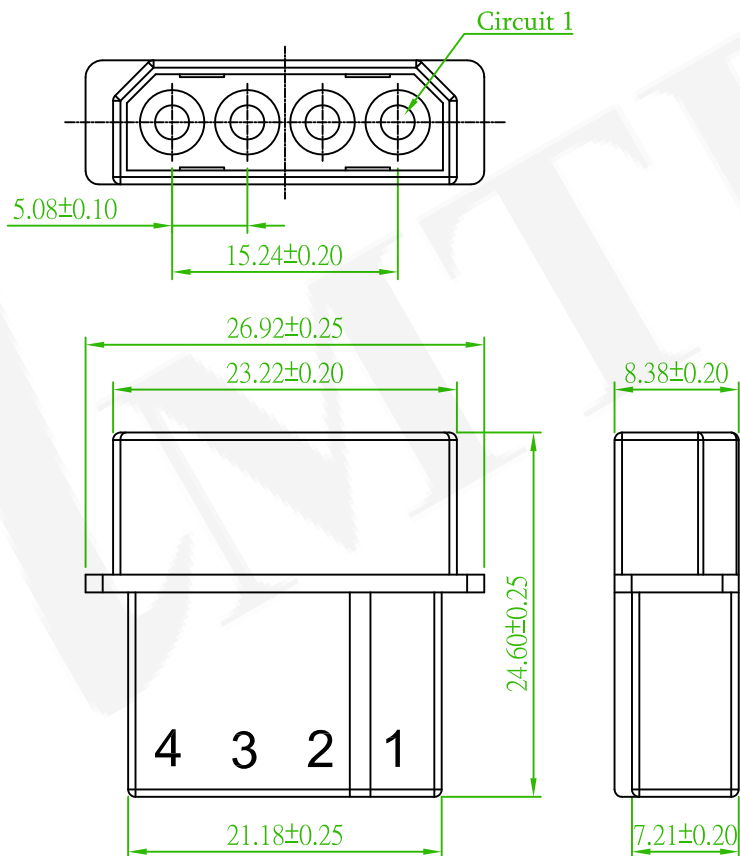

Old Part No.:5082H-M04W-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.08mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H5082M0-104WBL00A01				繪圖 DRAWN	Kent 2006/11/20
	圖號 DRAWING NO.	GW090-EL049	版本 REV.	A	核對 CHECKED	Paul 2006/11/20	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2006/11/20	
	公差 TOLERANCE	.X ±0.35 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		