

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute


Material:Nylon 66,UL94V-2

ORDER INFORMATION

5	H	5	0	8	3	N	X	-	1	X	X	W	B	L	0	0	A	0	1	
Pitch 5.08mm				N:Other		0:TYPE 0 1:TYPE 1		No. of contacts per row			W:White		B:Bag Package		RoHS					



PIN	Dimensions	
	A	B
02P	5.08	10.08
03P	10.16	15.16
04P	15.24	20.24
05P	20.32	25.32
06P	25.40	30.40
07P	30.48	35.48
08P	35.56	40.56
09P	40.64	45.64
10P	45.72	50.72
11P	50.80	55.80
12P	55.88	60.88
13P	60.96	65.96
14P	66.04	71.04
15P	71.12	76.12
16P	76.20	81.20
17P	81.28	86.28
18P	86.36	91.36
19P	91.44	96.44
20P	96.52	101.52

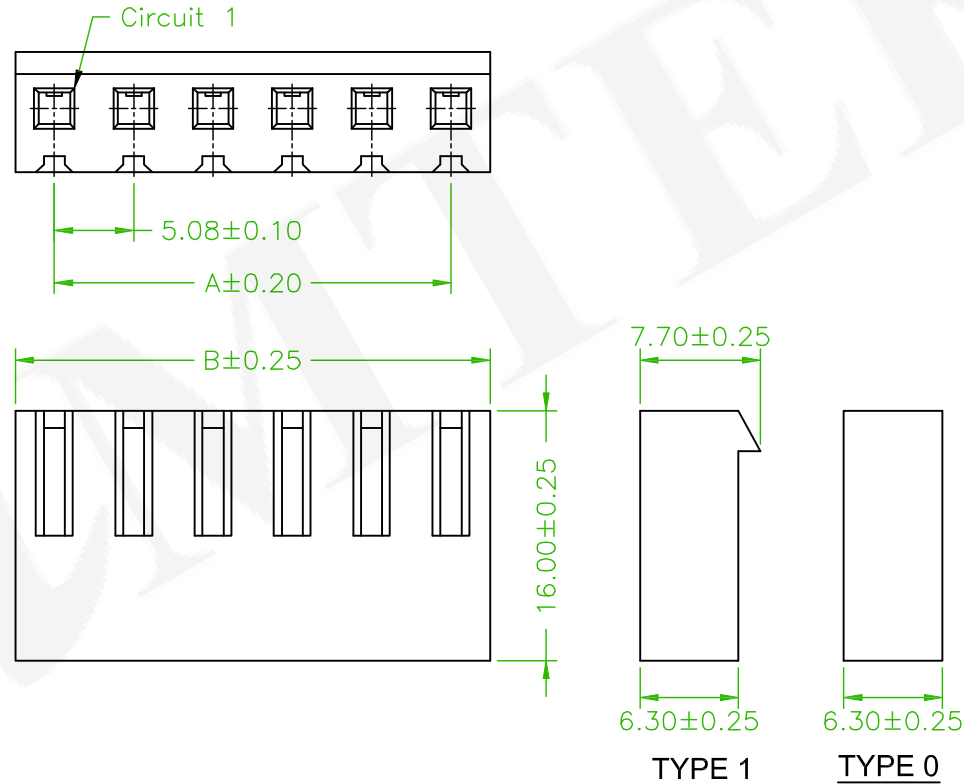

Old Part No.:5083H-XXWX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.08mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H5083NX-1XXWBL00A01				繪圖 DRAWN	Eloise 2016/11/18
	圖號 DRAWING NO.	GW090-JF022	版本 REV.	A	核對 CHECKED	Jonny 2016/11/18	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/18	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	.X° ± 1°	單位 UNIT	mm	THIRD ANGLE PROJECTION	