

SPECIFICATIONS

Material:PA66,UL94V-2

Voltage Rating: 600V AC,DC

Temperature Range: -40°C to +105°C

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 2200V AC/minute

Current rating:With tinned AWG copper wire

Wire size		N			
AWG	Max. Ins. Dia.	2x1	2x2	2x3	2x4~2x6
#12 ÷ 4.0mm ²	.162"(4.11mm)	23	20	18	16
#14 ÷ 2.5mm ²	.148"(3.75mm)	21	17	15	13
#16 ÷ 1.5mm ²	.125"(3.18mm)	17	15	13	12

ORDER INFORMATION

5 H 5 7 0 0 F 1 - 2 X X X X L 0 0 I 0 1

Pitch 5.70mm

1:With bump

No. of contacts
per row


B:Black

B:Bag Package






RoHS

(No. of Positions x 5.7 + 0.65) ± 0.4

(No. of contacts - 1) x 5.7



2x3

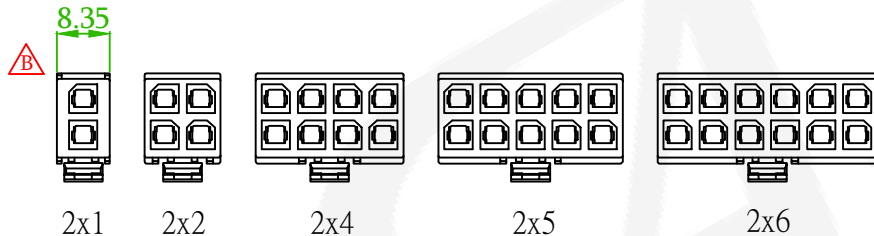

2x1

2x2

2x4

2x5

2x6

AMTEK 糧德

2023.07.04

Released DCC



REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△B x1	Add the Fool Holes	Alice	2023/07/04


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	5.7mm HOUSING				頁數 Page	1/1
品號 PART NO.	5H5700F1-2XXXXL00I01			繪圖 DRAWN	Mia 2016/05/03	
圖號 DRAWING NO.	GW080-AC682			版本 REV.	B	核對 CHECKED
客戶品號 CUSTOMER P/N				比例 SCALE	None	承認 APPROVED
公差 TOLERANCE	.X ± 0.4 .XX ± 0.25			單位 UNIT	mm	THIRD ANGLE PROJECTION