

Specifications

Current Rate:3 AMP
Insulation Resistance:5000M Ω Min.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C


Material

Insulator:PBT, UL94V-0
Terminal:Copper alloy

FINISH

Gold plated on contact area, Nickle underplated overall


ORDER INFORMATION

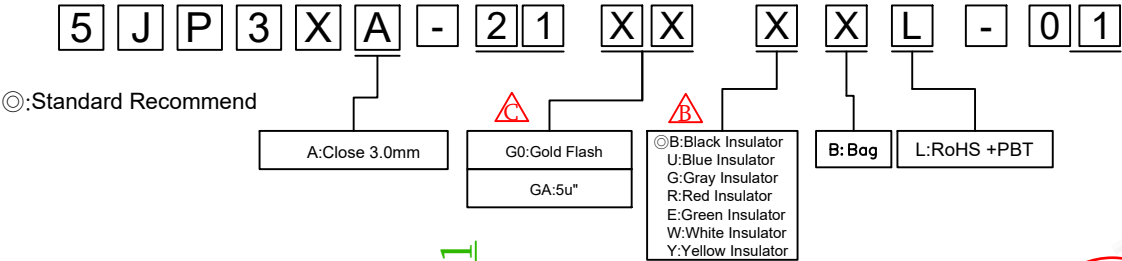

AMTEK 耀德

2023.06.01

Released DCC

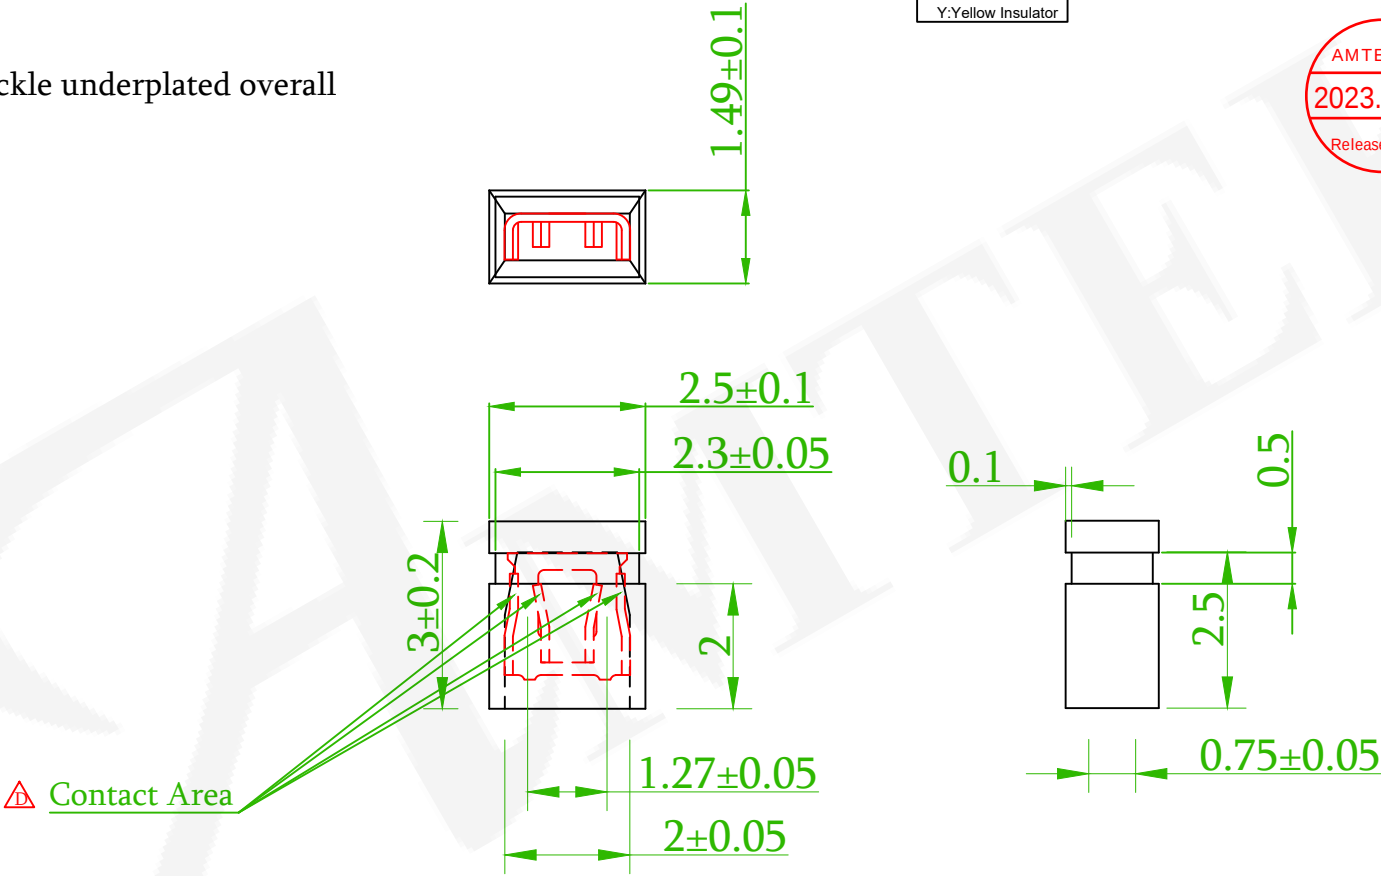

AMTEK

耀德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MINI JUMPER 1.27mm				頁數 Page	1/1
品號 PART NO.	5JP3XA-21XXXXL-01				繪圖 DRAWN	Roy 2016/03/25
圖號 DRAWING NO.	GN047-MC671	版本 REV.	D	核對 CHECKED	Owen 2016/03/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/03/25	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.13	單位 UNIT	mm	THIRD ANGLE PROJECTION		

△x2	ECN NO.230113: Revise the Specification & Drawing	Rex	2023/03/29
△x2	Add GA:5u"	David	2019/05/23
△x1	Add The Color:Yellow	Mia	2017/10/12
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE