

SPECIFICATION

Current Rating: 0.5 AMP
 Insulation Resistance: 1000MΩ Min/500V DC
 Contact Resistance: 100mΩ Max.
 Operation Temperature: -40°C to +85°C
 Mating Cycles: 5000 times

MATERIAL

Insulator:LCP,UL 94V-0
 Contact :Phosphor Bronze
 Shell: SUS

ORDER INFORMATION

5 K M S S - X X X X X X B 0 1

No. of contacts
06, 08


G0:Gold Flash

N: W/O Pag


H: T/R W/O Cap



AMTEK 糧德
 2023.08.25
 Released DCC

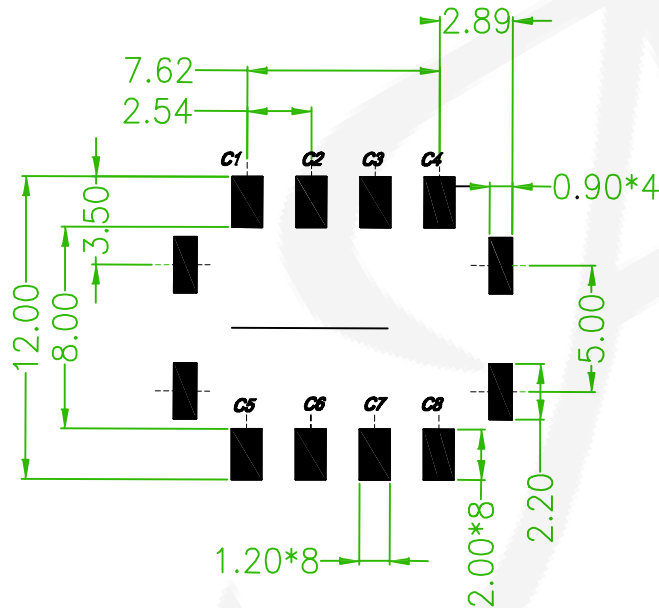

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

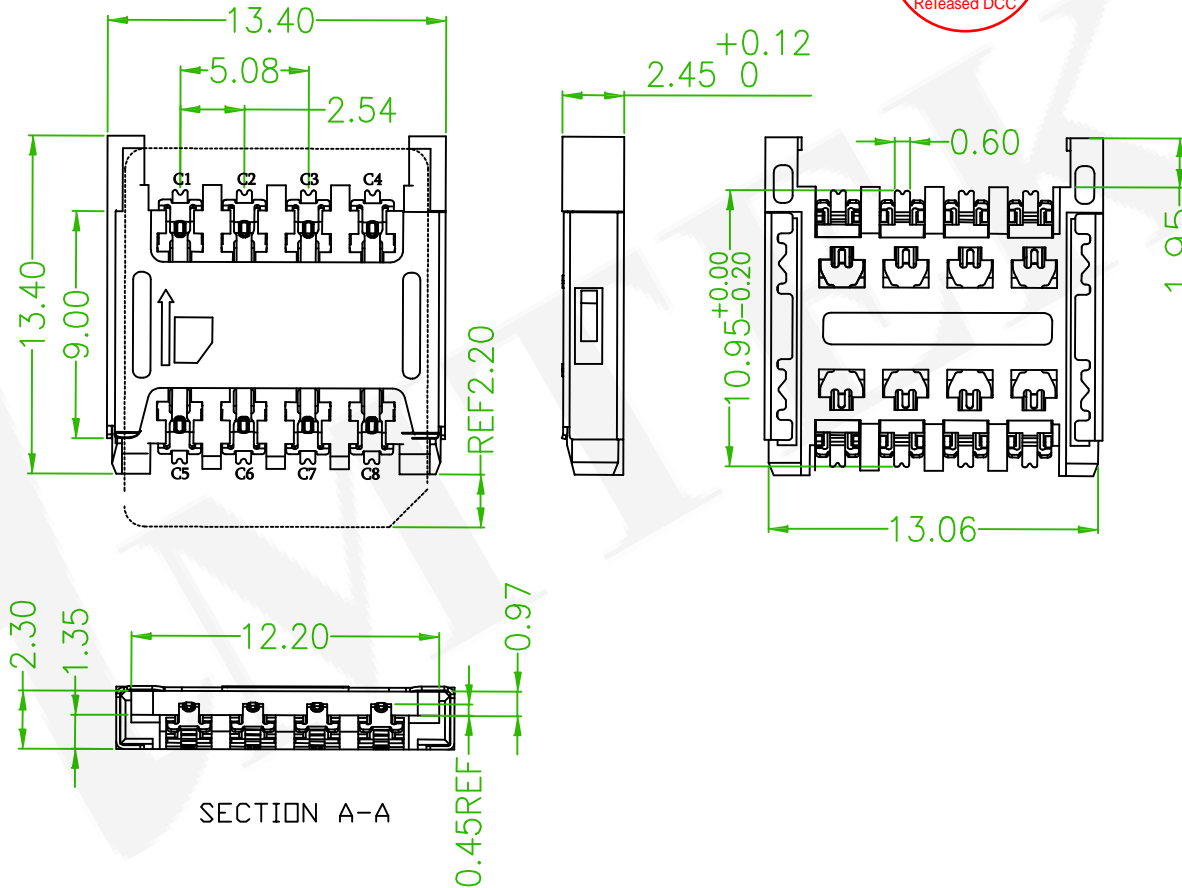

SECTION A-A

| | | | | | | |
|--|----------------------|-------------------------|-------------|------------|----------------|------------------------------|
| 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030 | 品名 TITLE | MICRO SIM CARD | | | 頁數 Page | 1/1 |
| | 品號 PART NO. | 5KMSS-XXXXXXB01 | | | 繪圖 DRAWN | Gary 2017/06/13 |
| | 圖號 DRAWING NO. | GW066-GA433 | 版本 REV. | B | 核對 CHECKED | Jerry 2017/06/13 |
| | 客戶品號 CUSTOMER P/N | | 比例 SCALE | 3:1 | 承認 APPROVED | Jerry 2017/06/13 |
| | 公差 TOLERANCE | .X ± 0.20 .XX ± 0.20 | X°±3° | 單位 UNIT | mm | THIRD ANGLE PROJECTION |
| | | | | | | |

| | | | |
|------|------------------------------------|---------|------------|
| △ | QEC NO.: 230804 Revise the drawing | Benson | 2023/08/17 |
| REV. | ECN NO. OR DESCRIPTION | REVISED | DATE |