

SPECIFICATIONS

Current Rating: 1 AMP

Contact Resistance: 10mΩ Max.

Dielectric Voltage: 1000V AC for one minute

Operating Temperature: -40°C ~ +105°C

MATERIAL




Insulator: PPS, UL94V-0

Contact Pin: Copper Alloy

ORDER INFORMATION

5 M C 1 R 3 0 X - 3 X X X X B X U - 0000 - 0 1

A: With Central Support(06~18) B: W/O Central Support(20~28)	Distance between Rows	No. of contacts (06,08,10,12,14,16, 18,20,22,24,28)	S0:Selective SB:10u" SF:15u" SD:30u" T0:Tin Plated	B:Black	T:Tube X:Box	RoHS
---	-----------------------	---	--	---------	-----------------	------

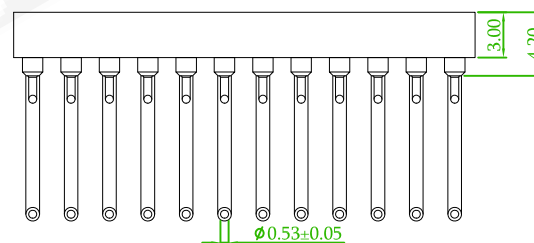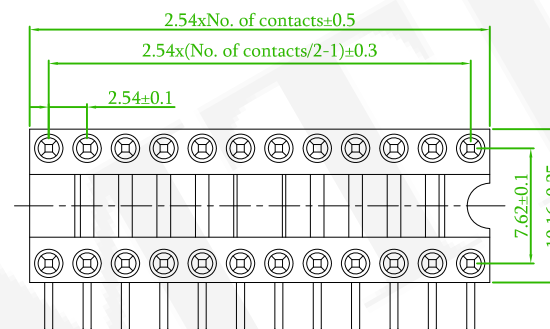

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No.: MSICR-316SBB-2-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Machine Pin Socket 2.54mm				頁數 Page	1/1
	品號 PART NO.	5MC1R30X-3XXXXBXU-0000-01				繪圖 DRAWN	Andy 2017/11/01
	圖號 DRAWING NO.	GN003-AA216	版本 REV.	A	核對 CHECKED	Jason 2017/11/01	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/11/01	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	