

SPECIFICATIONS

Current Rating: 1 AMP

Contact Resistance: 10mΩ Max.

Dielectric Voltage: 1000V AC for one minute

Operating Temperature: -40°C ~ +105°C




MATERIAL

Insulator: PPS+30%G.F, UL94V-0


Contact Pin: Copper Alloy

ORDER INFORMATION

5 M C 1 S 1 9 X - 3 X X X X B T U 0482 - 0 1

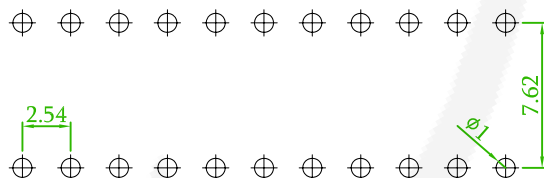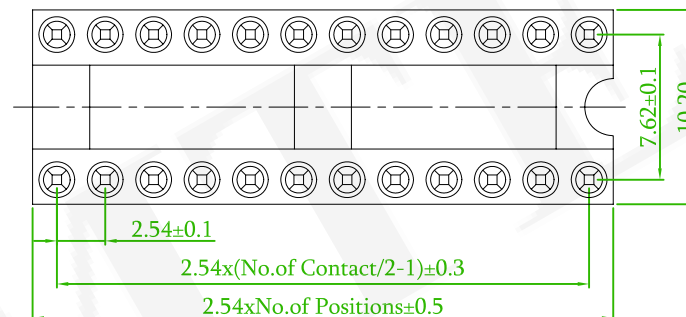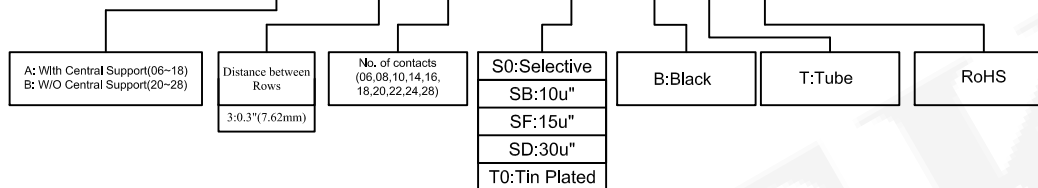

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

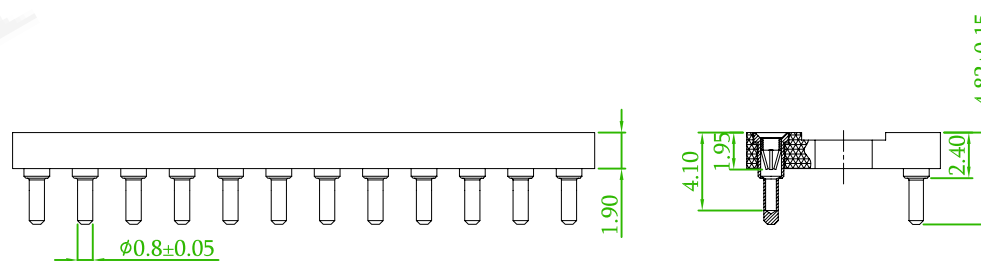

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN SOCKET 2.54mm				頁數 Page	1/1
	品號 PART NO.	5MC1S19X-3XXXXBTU-0482-01				繪圖 DRAWN	Andy 2017/11/06
	圖號 DRAWING NO.	GN003-AA241		版本 REV.	A	核對 CHECKED	Jason 2017/11/06
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2017/11/06
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION	