

SPECIFICATIONS

Current Rating: 3 AMP

Contact Resistance: 10mΩ Max.

Dielectric Voltage: 1000V AC for one minute

Operating Temperature: -40°C ~ +105°C


MATERIAL

Insulator: PPS+30%G.F. , UL94V-0



Contact Pin: Copper Alloy

ORDER INFORMATION



5 M H 1 M 3 0 N - 2 X X X X B X U - 0 0 0 0 - 0 1

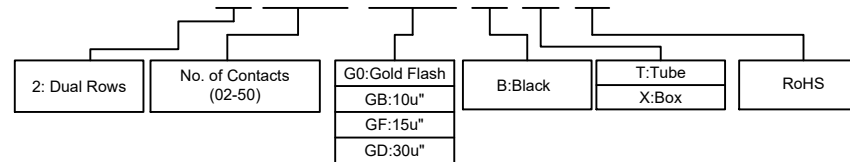

Amtek
2017.11.27
文管中心

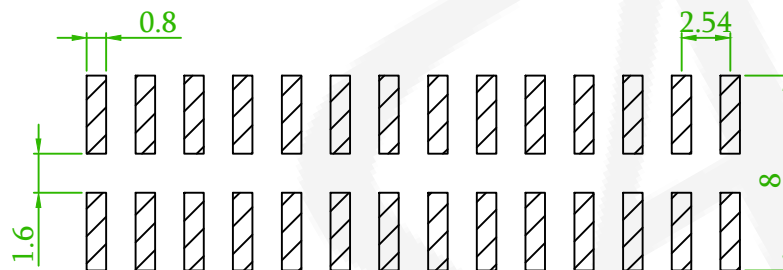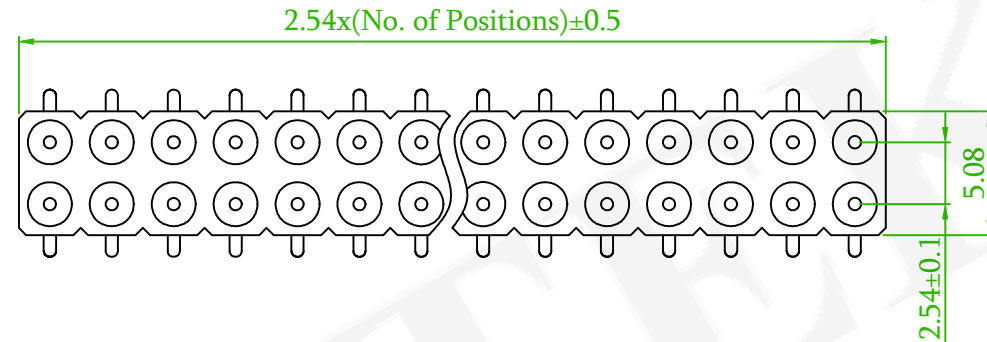

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

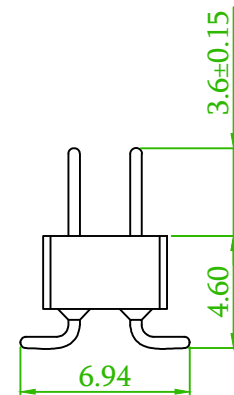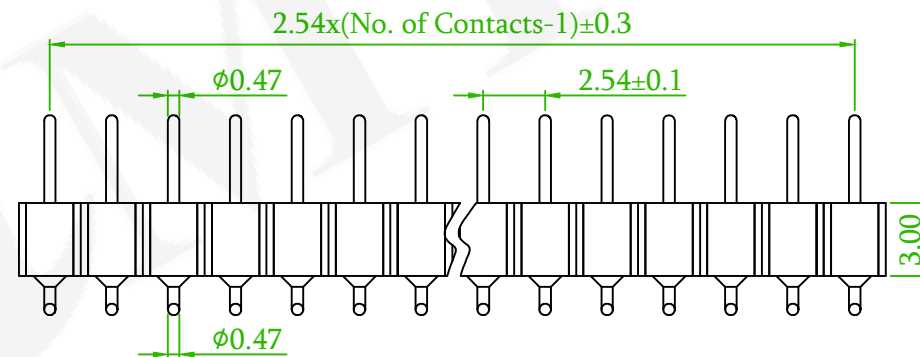

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5MH1M30N-2XXXXXBXU-0000-01				繪圖 DRAWN	Gary 2017/11/06
	圖號 DRAWING NO.	GN003-GA729	版本 REV.	A	核對 CHECKED	Jason 2017/11/06	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/11/06	
	公差 TOLERANCE	.X ±0.40 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE