

SPECIFICATIONS






Current Rate:3 AMP
Insulation Resistance: ≥1000MΩ at V=100V
Contact Resistance: ≤10mΩ/Contact
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION

5 M H 1 Q 3 0 N - 1 X X X X B T U - 0000 - 0 1

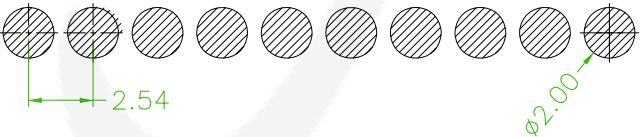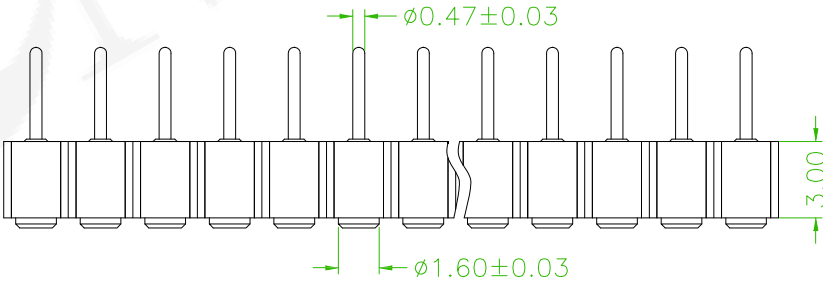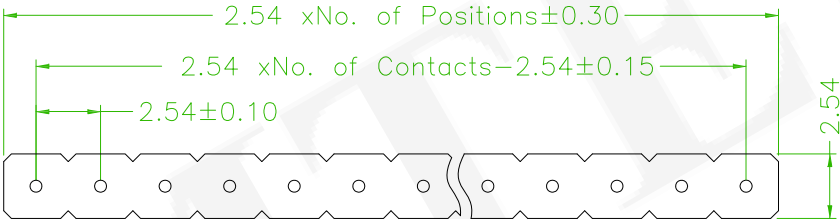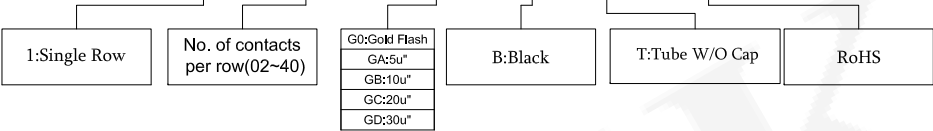

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. :MH1M-1XX-1-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN HEADER SMT TYPE 2.54mm				頁數 Page	1/1
	品號 PART NO.	5MH1Q30N-1XXXXBTU-0000-01				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/09/16	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/16	
	公差 TOLERANCE	.X ±0.40 .XX ±0.25	.X° ±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	