

Specifications



Current Rate:3 AMP
Insulation Resistance:≥1000MΩ at V=100V.
Contact Resistance:≤10mΩ/Contact
Dielectric voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:High Temperature Thermoplastic, UL94V-0
Terminal:Copper Alloy

ORDER INFORMATION

5MH1R30N-1XXXXBTU-0500-01

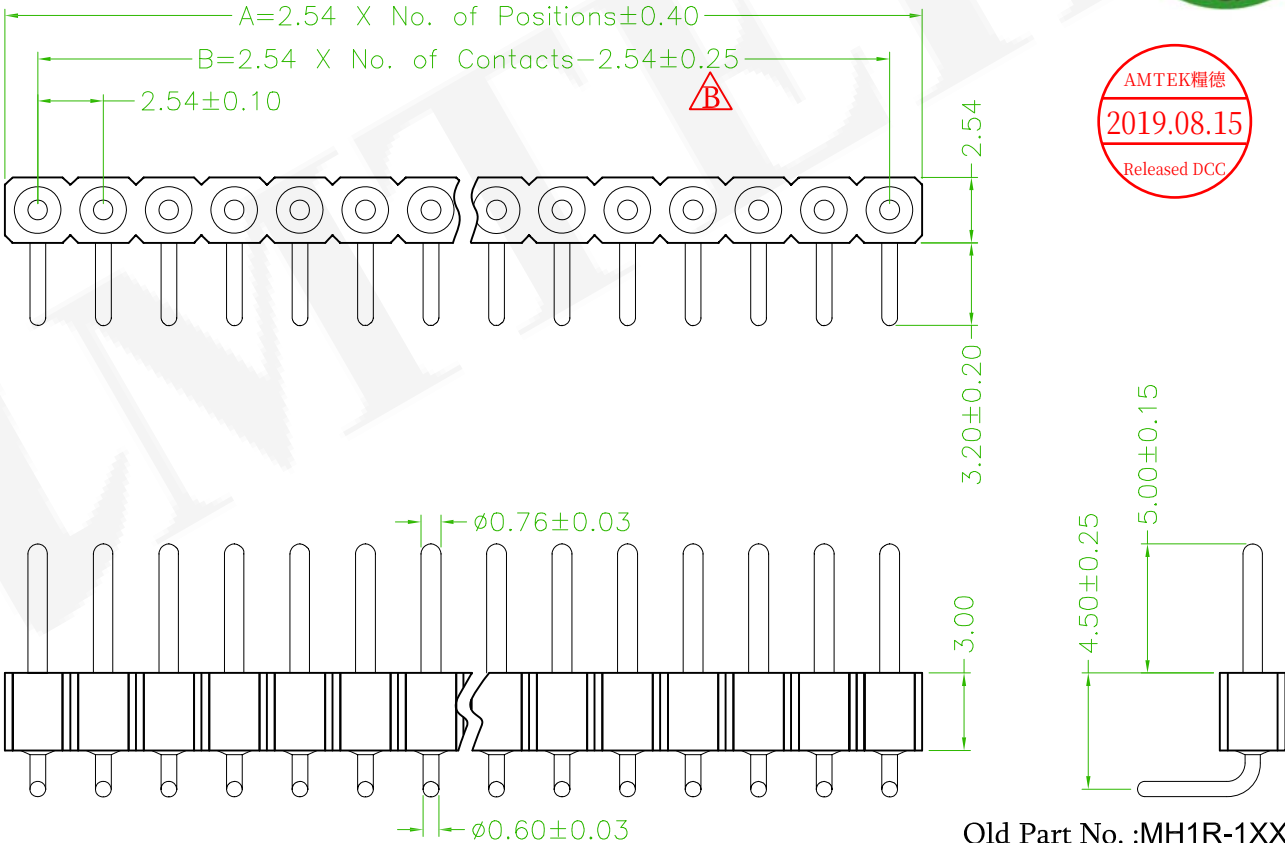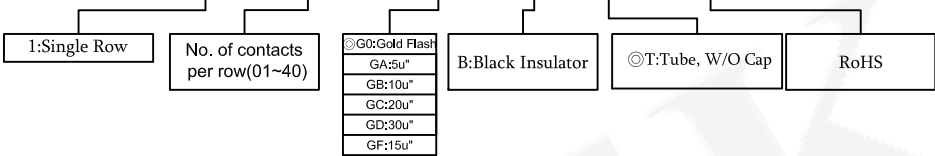

Recommended P.C.B Layout

Old Part No. :MH1R-1XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



ECN NO. 190706 Revise the dimension

Benson

2019/08/13

AMTEK

糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MACHINE PIN HEADER R/A TYPE 2.54mm				頁數 Page	1/1
品號 PART NO.	5MH1R30N-1XXXXBTU-0500-01				繪圖 DRAWN	Jeff 2015/09/16
圖號 DRAWING NO.	GN003-BS198		版本 REV.	B	核對 CHECKED	John 2015/09/16
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	John 2015/09/16
公差 TOLERANCE	.X ±0.35 .XX ±0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	