

SPECIFICATIONS

Current Rating: 3 AMP
Contact Resistance: 10mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C





MATERIAL

Insulator: PPS+30%G.F. , UL94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION

5 M H 1 R 3 0 N - 2 X X X X B X U - 0500 - 0 1

2:Double Row	No. of contacts per row(02~50)	G0:Gold Flash GB:Au 10u" GF:Au 15u" GD:Au 30u"	B:Black Insulator	T:Tube W/O Cap X:Box	RoHS
--------------	--------------------------------	---	-------------------	-------------------------	------

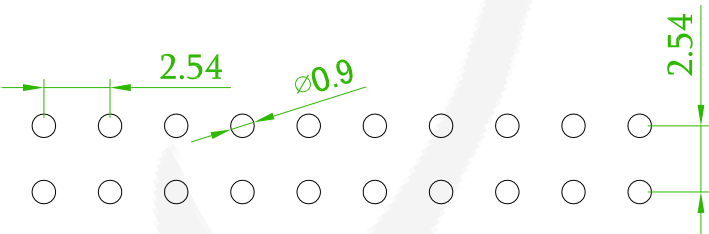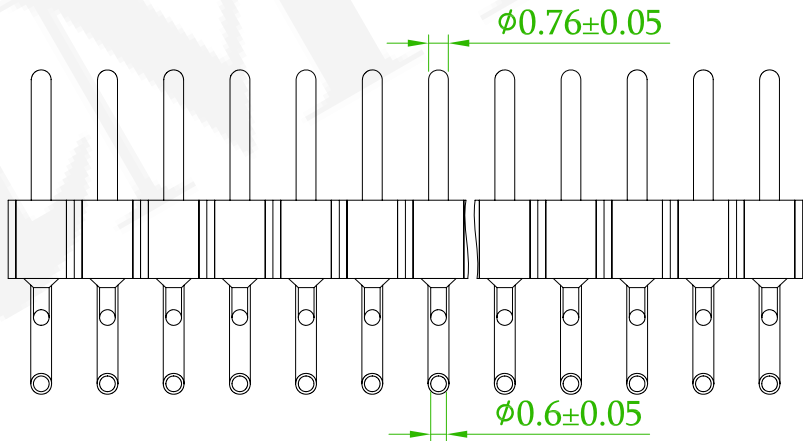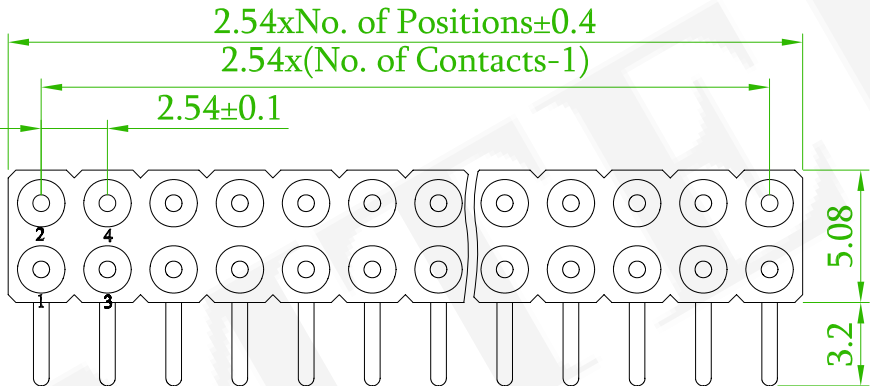

Recommended P.C.B Layout
(PCB BOARD TOLERANCE±0.1)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm MACHINE PIN HEADER				頁數 Page	1/1
	品號 PART NO.	5MH1R30N-2XXXXBXU-0500-01				繪圖 DRAWN	Gary 2017/08/18
	圖號 DRAWING NO.	GN003-GA552		版本 REV.	A	核對 CHECKED	Carol 2017/08/18
	客戶品號 CUSTOMER P/N			比例 SCALE	1:1	承認 APPROVED	Jason 2017/08/18
	公差 TOLERANCE	.X ±0.40 .XX ±0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	