

Specifications






Current Rate:3 AMP
Insulation Resistance:≥1000MΩ at V=100V.
Contact Resistance:≤10mΩ/Contact
Dielectric voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:High Temperature Thermoplastic, UL94V-0
Terminal:Copper Alloy

ORDER INFORMATION

5 M H 1 S 3 0 N - 1 X X X X B T U - 1220 - 0 1

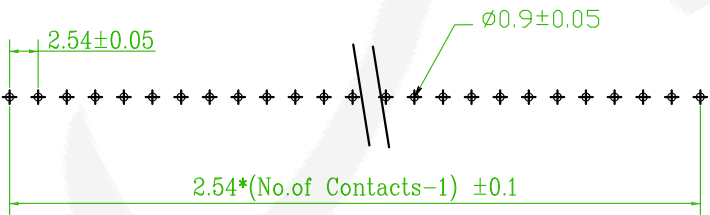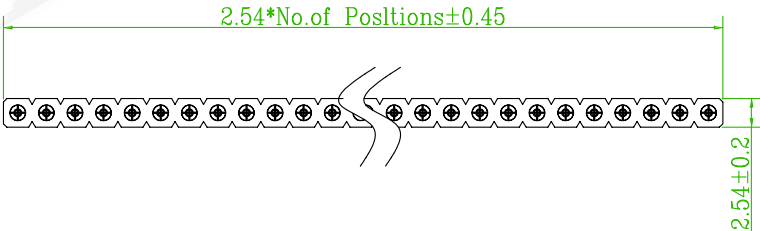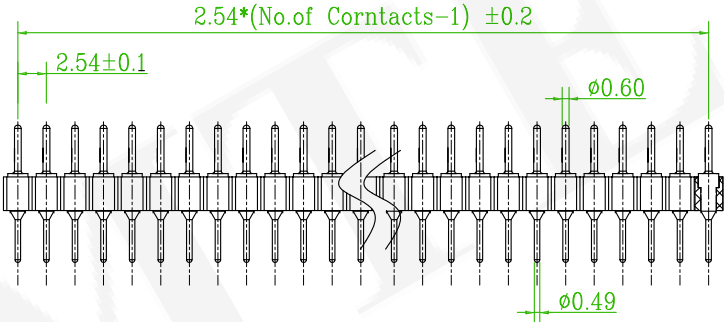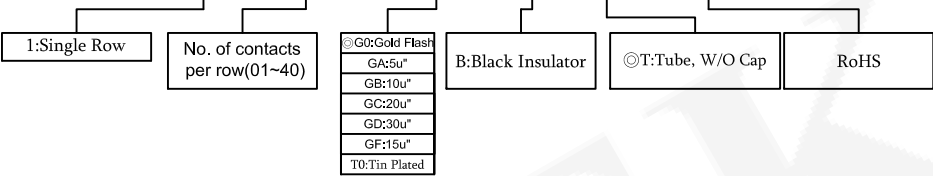

P. C. Board Layout

Old Part No.:MH1S30N-1XXXXBTU-1220-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN HEADER STRAIGHT TYPE 2.54mm			頁數 Page	1/1
	品號 PART NO.	5MH1S30N-1XXXXBTU-1220-01			繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/09/16
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/16
	公差 TOLERANCE	.X ±0.40 .XX ±0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION
						