

SPECIFICATIONS

Current Rating: 3 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 30mΩ Max.

Dielectric Voltage: 1000V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL



Insulator: PPS or PBT, UL94V-0

Contact Pin: Copper Alloy

ORDER INFORMATION

5 M H 1 S 3 0 N - 2 X X X X B B X - 1215 - 0 1

2: Dual Rows	No. of Contacts per Row (01-40)	G0:Gold Flash GB:Au 10u" GF:Au 15u" T0:Tin Plated	B:Black	B:Bag	U: For PPS, RoHS L: For PBT, RoHS
--------------	------------------------------------	--	---------	-------	--------------------------------------

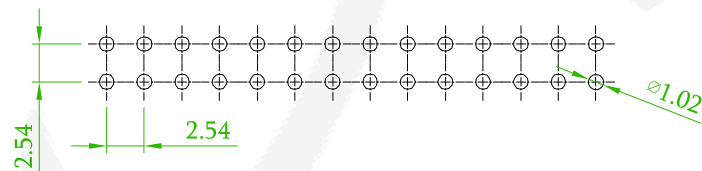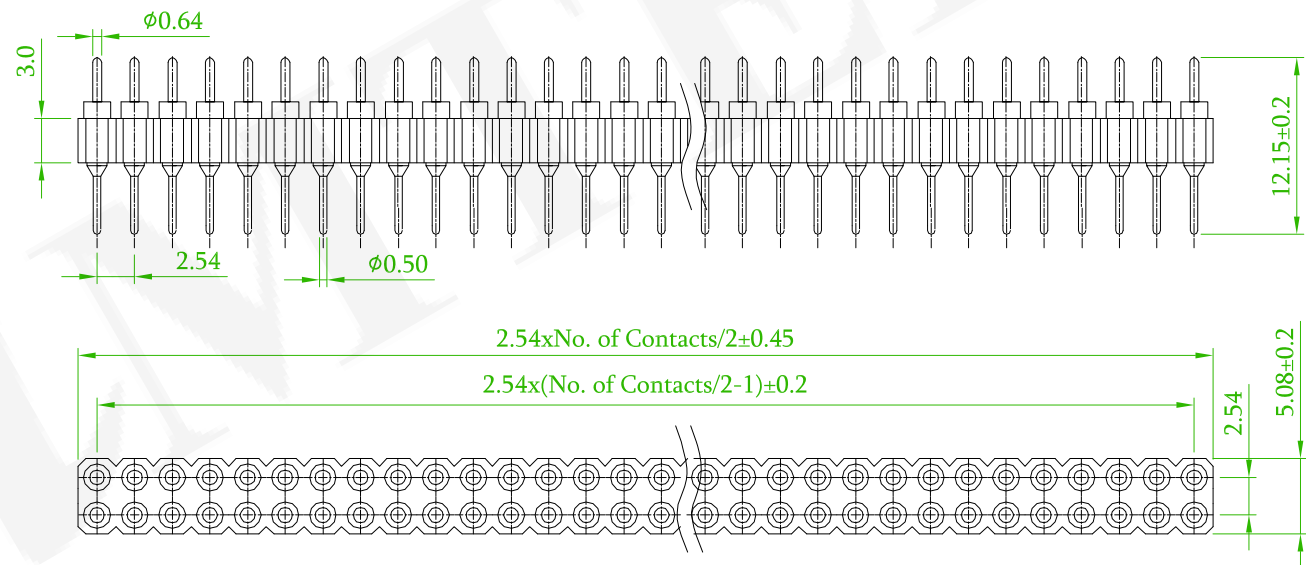

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm MACHINE PIN HEADER D/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5MH1S30N-2XXXXBBX-1215-01				繪圖 DRAWN	Gary 2018/02/13
	圖號 DRAWING NO.	GN032-GA993				核對 CHECKED	Josh 2018/02/13
	客戶品號 CUSTOMER P/N					承認 APPROVED	Jason 2018/02/13
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10				單位 UNIT	mm
						THIRD ANGLE PROJECTION	