

SPECIFICATIONS





Current Rating: 3 AMP
Insulation Resistance: ≥1000MΩ at V=100V
Contact Resistance: ≤10mΩ/Contact
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION

5 M H 1 S 3 0 N - 2 X X X X B T U - 1196 - 0 1

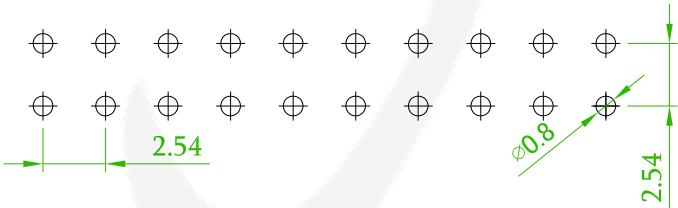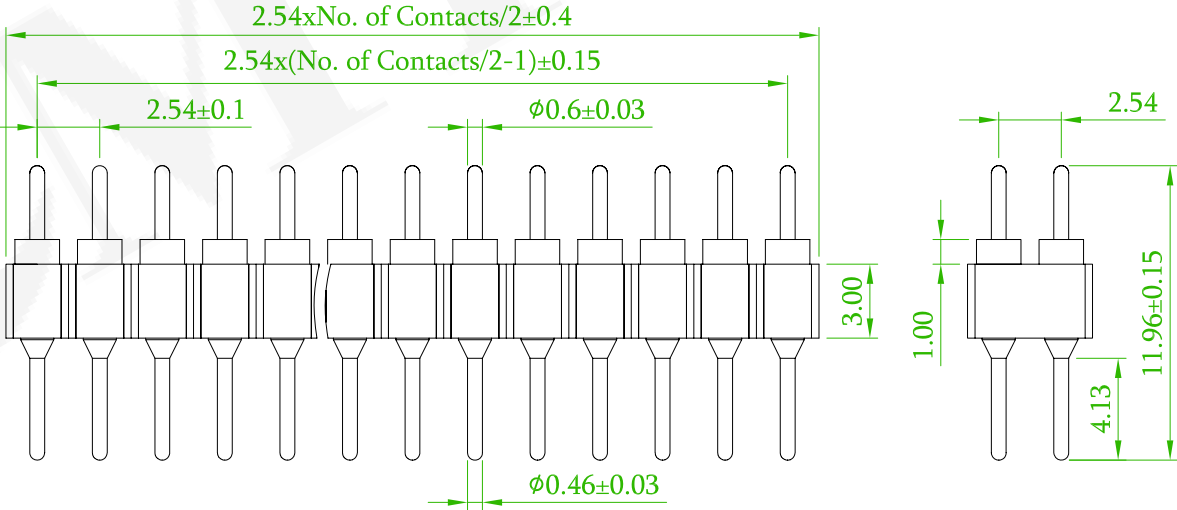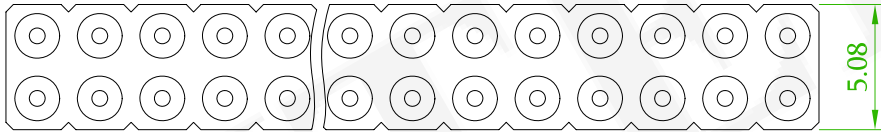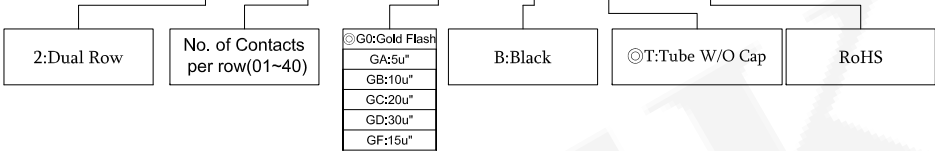

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.: MH1S30-2XX-1196-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm MACHINE PIN HEADER D/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5MH1S30N-2XXXXBTU-1196-01				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED		John 2015/09/16
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED		John 2015/09/16
	公差 TOLERANCE	.X ±0.40 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		