

Specifications





Current Rate:3 AMP
Insulation Resistance:≥1000MΩ at V=100V.
Contact Resistance:≤10mΩ/Contact
Dielectric voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:High Temperature Thermoplastic, UL94V-0
Terminal:Copper Alloy

ORDER INFORMATION

5 M H 2 S 2 8 N - 1 X X X X B T U - 1000 - 0 1

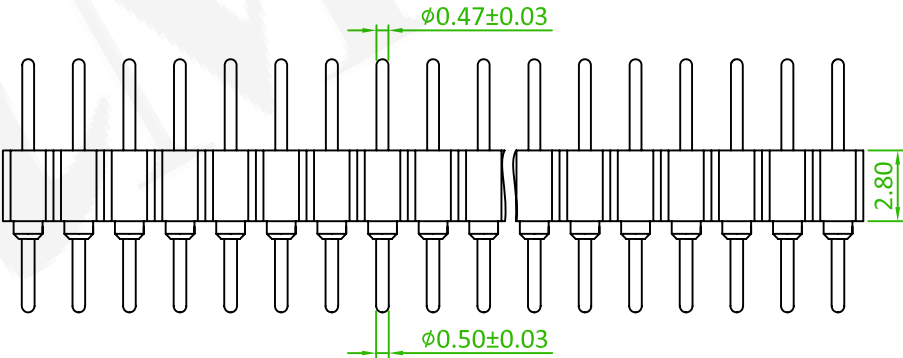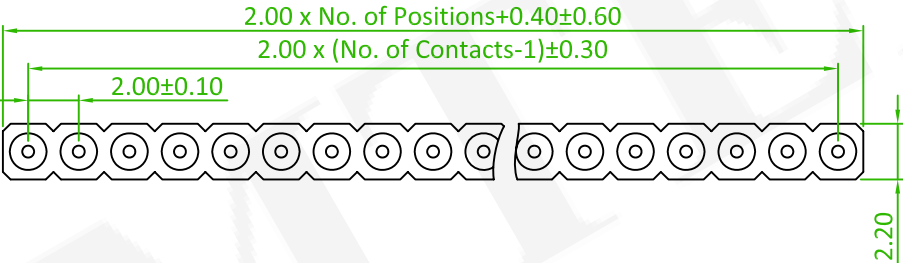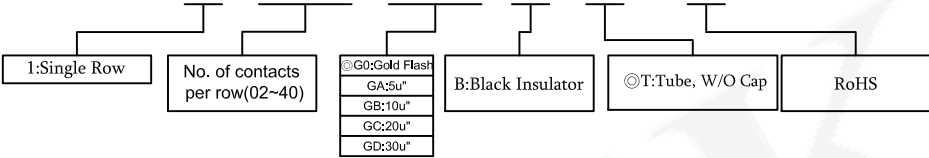

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Old Part No. :MH2S-1XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN HEADER STRAIGHT TYPE				頁數 Page	1/1
	品號 PART NO.	5MH2S28N-1XXXXBTU-1000-01				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/09/16	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/16	
	公差 TOLERANCE	.X ±0.25 .XX ±0.20	.X°±2	單位 UNIT	mm	THIRD ANGLE PROJECTION	