

SPECIFICATIONS




Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 10mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operating Temperature: -40°C ~ +105°C

MATERIAL



Insulator: PPS+30%G.F., UL94V-0
 Contact Pin: Copper Alloy

ORDER INFORMATION


5 M H 2 S 2 8 N - 2 X X X X B T U - 1000 - 0 1

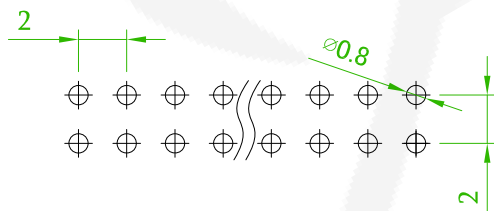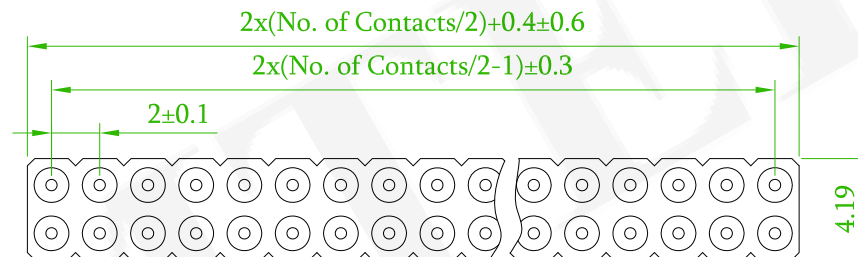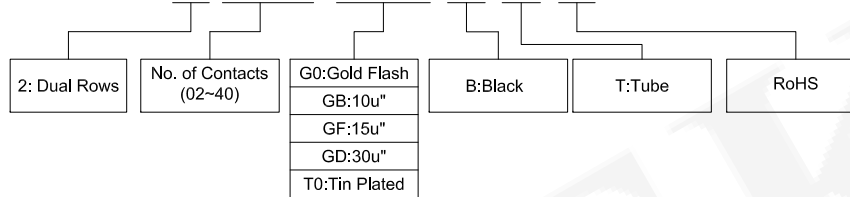

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

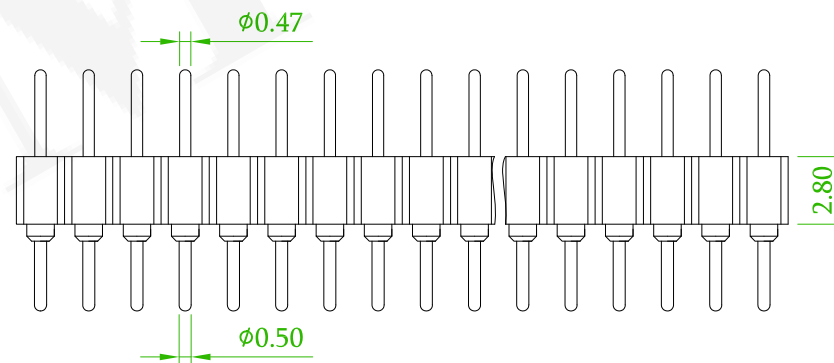

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.00mm MACHINE PIN HEADER D/R V/T DIP TYPE			頁數 Page	1/1
	品號 PART NO.	5MH2S28N-2XXXXBTU-1000-01			繪圖 DRAWN	Gary 2018/04/16
	圖號 DRAWING NO.	GN003-GB075	版本 REV.	A	核對 CHECKED	Josh 2018/04/16
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/04/16
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	