

Specifications

Current Rate:1 AMP

Insulation Resistance: $\geq 1000M\Omega$ at $V=100V$.

Contact Resistance: $\leq 10m\Omega$ /Contact

Dielectric Voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C

Material

Insulator:High Temperature


Thermoplastic+30%G.F(UL94V-0)

Terminal:Copper Alloy

ORDER INFORMATION

5 M H 3 H 2 2 N - 1 X X X X B X U - 0000 - 0 1

1:Single Row	No. of contacts per row(02~50)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	B:Black Insulator	◎T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel,W/O Cap R:Tape & Reel,With Cap	RoHS
--------------	--------------------------------	---	-------------------	---	------

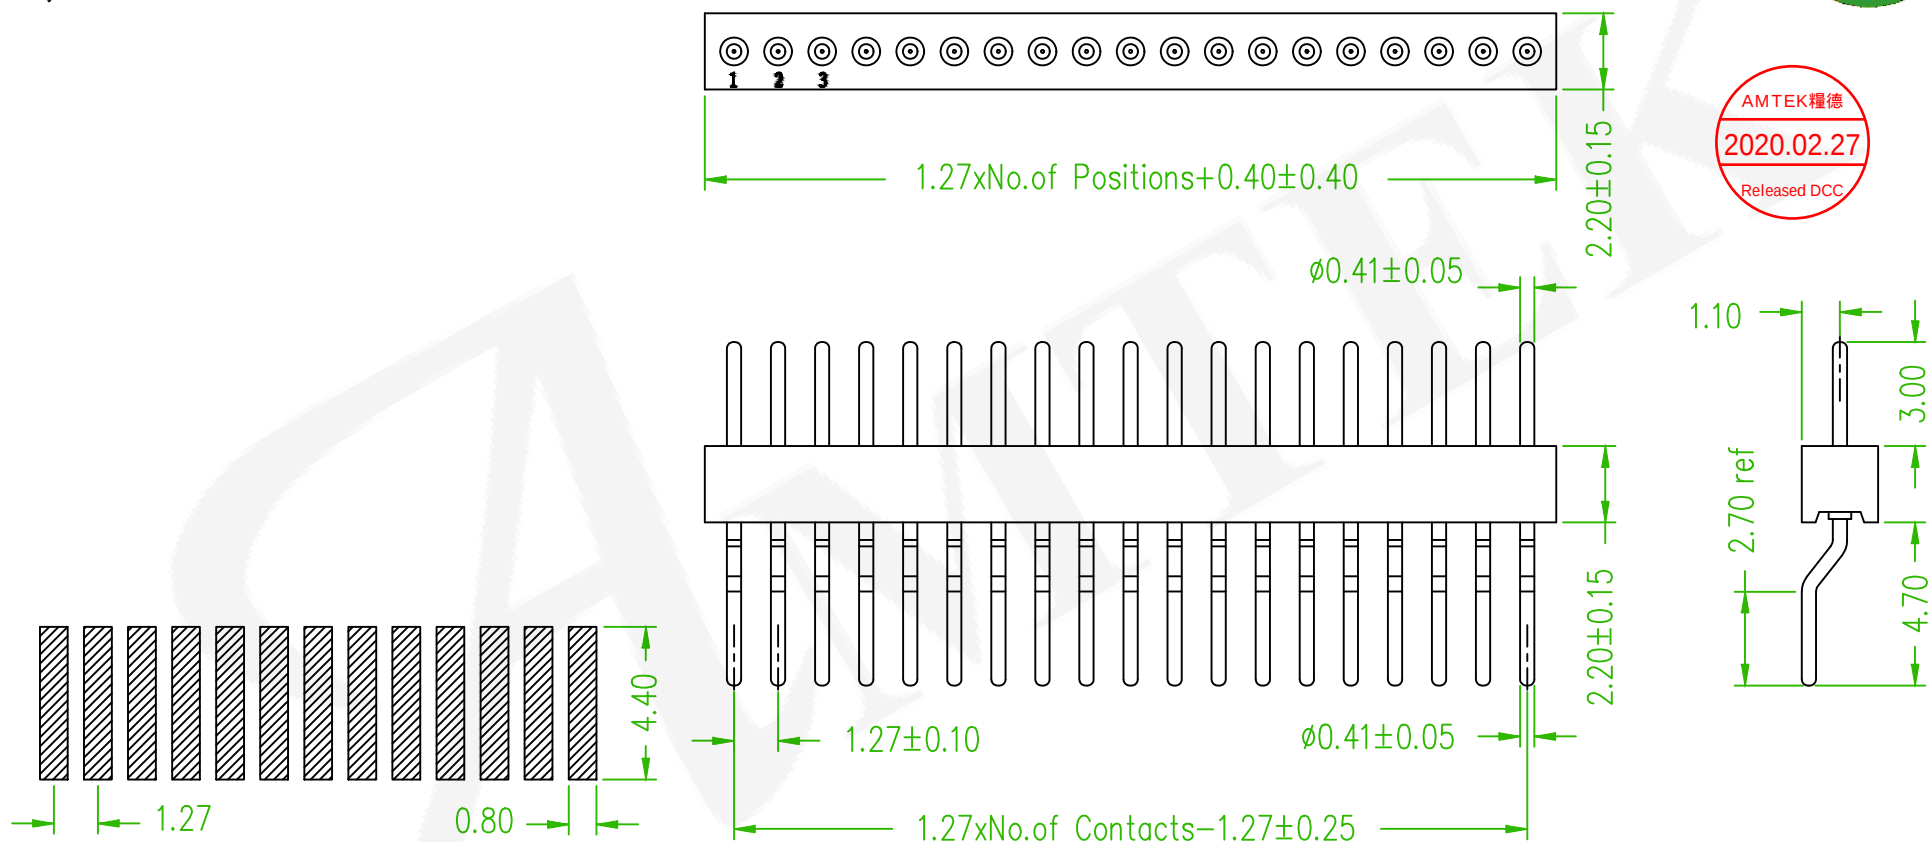

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

Old Part No. :MH3MR-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN HEADER SMT R/A TYPE 1.27mm				頁數 Page	1/1
	品號 PART NO.	5MH3H22N-1XXXXBXU-0000-01				繪圖 DRAWN	Jeff 2015/08/27
	圖號 DRAWING NO.	GN003-BS878	版本 REV.	B	核對 CHECKED	John 2015/08/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/27	
	公差 TOLERANCE	$\Delta X \pm 0.40$ $\Delta XX \pm 0.25$	$X \pm 2$	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO.: 200108 Revise the tolerance	Benson	2020/02/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE