

ORDER INFORMATION


5 M H 3 M 1 9 N - 2 X X X X B T U - 0000 - 0 1

2: Dual Row	No. of Contacts Per Row(02~50)	G0:Gold Flash GB:Au 10u" GF:Au 15u" GD:Au 30u"	B:Black Insulator	T:Tube	RoHS
-------------	--------------------------------	---	-------------------	--------	------



A red circular stamp with the text "Amtek" at the top, "2017.11.27" in the middle, and "文管中心" at the bottom.

Insulator: PPS+30%G.F, UL94V-0

Contact Pin: Copper Alloy

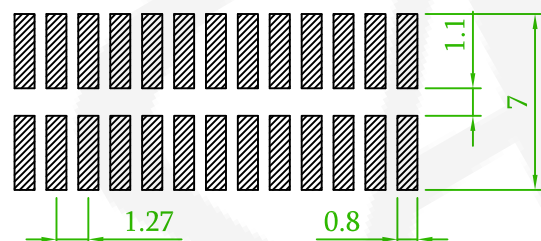

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

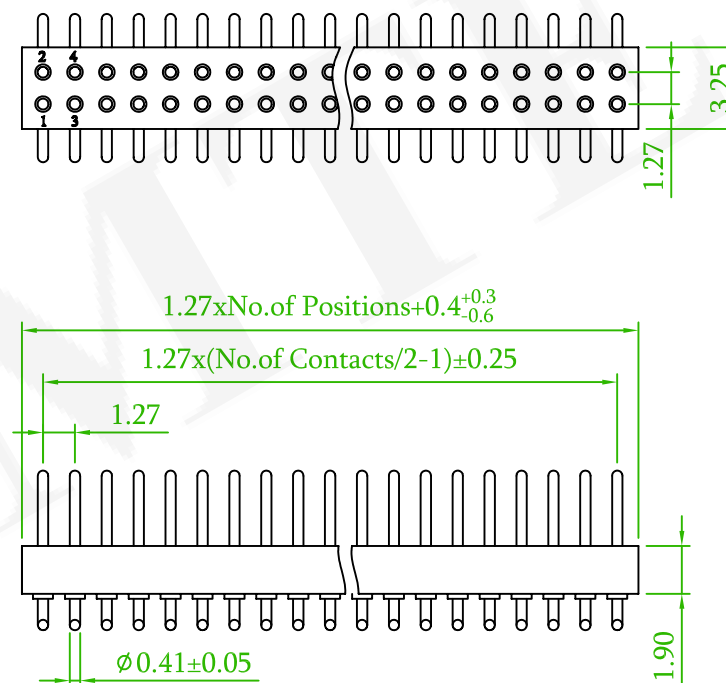

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MACHINE PIN HEADER 1.27mm					頁數 Page	1/1
品號 PART NO.	5MH3M19N-2XXXXBTU-0000-01				繪圖 DRAWN	Roy 2017/11/02	
圖號 DRAWING NO.	GN003-RR087	版本 REV.	A	核對 CHECKED	Jason 2017/11/02		
客戶品號 CUSTOMER P/N		比例 SCALE	1:1	承認 APPROVED	Jason 2017/11/02		
公差 TOLERANCE	.X ±0.40 .XX ±0.25	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION		