

SPECIFICATIONS

Current Rating: 1 AMP
Contact Resistance: 10mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C


MATERIAL

Insulator: PPS+30%G.F, UL94V-0
Contact Pin: Copper Alloy




ORDER INFORMATION

5MH3R19N-3XXXBXU-0000-01

3:Triple Row	No. of Contacts Per Row(02~50)	G0:Gold Flash GB:Au 10u" GF:Au 15u" GD:Au 30u"	B:Black Insulator	T:Tube X:Box	RoHS
--------------	-----------------------------------	---	-------------------	-----------------	------

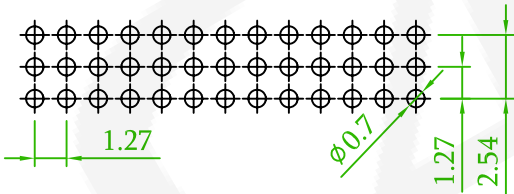

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

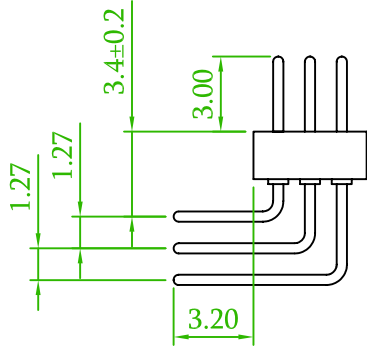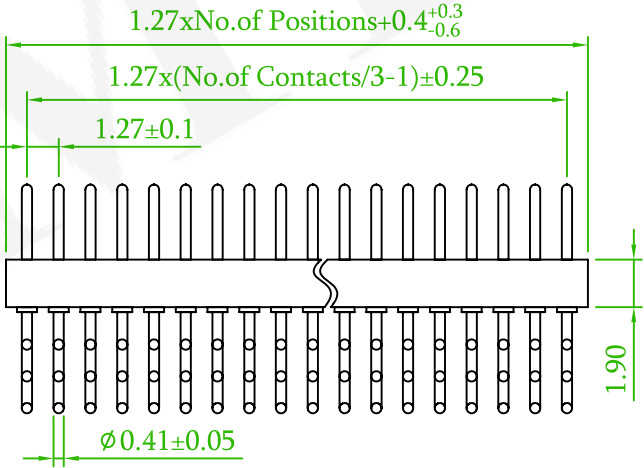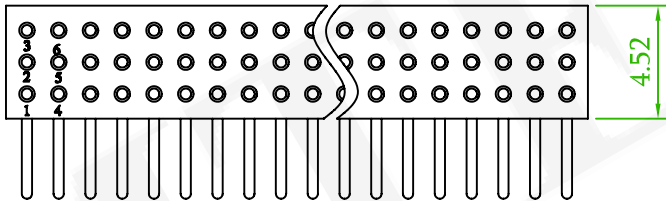

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN HEADER 1.27mm				頁數 Page	1/1
	品號 PART NO.	5MH3R19N-3XXXXBXU-0000-01				繪圖 DRAWN	Roy 2017/11/02
	圖號 DRAWING NO.	GN003-RR090		版本 REV.	A	核對 CHECKED	Jason 2017/11/02
	客戶品號 CUSTOMER P/N			比例 SCALE	1:1	承認 APPROVED	Jason 2017/11/02
	公差 TOLERANCE	.X ±0.40 .XX ±0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION	
		X°±3°					