

SPECIFICATIONS

Current Rating:1 AMP

Contact Resistance:10mΩ Max.

Dielectric Voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C

Life:500 Cycles Min.

MATERIAL

Insulator:PPS+30% G.F,UL94V-0

Contact:Copper Alloy



ORDER INFORMATION

5 M H 3 R 2 2 N - 1 X X X X B T U - 0300 - 0 1

1:Single Row	No. of contacts per row(02~50)	G0:Gold Flash GB:10u" GF:15u" GD:30u"	B:Black Insulator	T:Tube, W/O Cap	RoHS
--------------	-----------------------------------	--	-------------------	-----------------	------



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

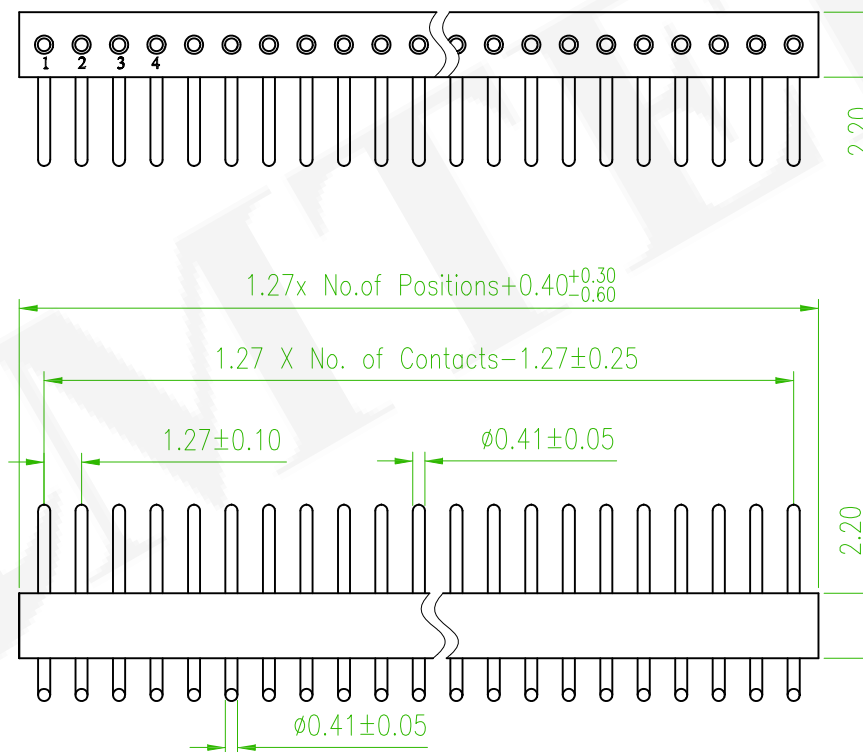

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN HEADER 1.27mm DIP R/A TYPE				頁數 Page	1/1
	品號 PART NO.	5MH3R22N-1XXXXBTU-0300-01				繪圖 DRAWN	Roy 2017/04/28
	圖號 DRAWING NO.	GN003-RL705		版本 REV.	A	核對 CHECKED	Jerry 2017/04/28
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2017/04/28
	公差 TOLERANCE	.X ±0.25 .XX ±0.20	X° ±2°	單位 UNIT	mm	THIRD ANGLE PROJECTION	